




Indoor Unit Specifications


Console			KM12XEDI
Air flow volume			dB (A)
Turbo	441 CFM	750 m3/h	45
High	383 CFM	650 m3/h	42
Med-high	353 CFM	600 m3/h	40
Medium	324 CFM	550 m3/h	38
Med-low	294 CFM	500 m3/h	37
Low	365 CFM	450 m3/h	34
Sleep	206 CFM	350 m3/h	29

Net weight:	33 Lbs	Gross weight:	39.7 Lbs
	15.5 Kg		18.5 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		2.96 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

Indoor unit Dimensions

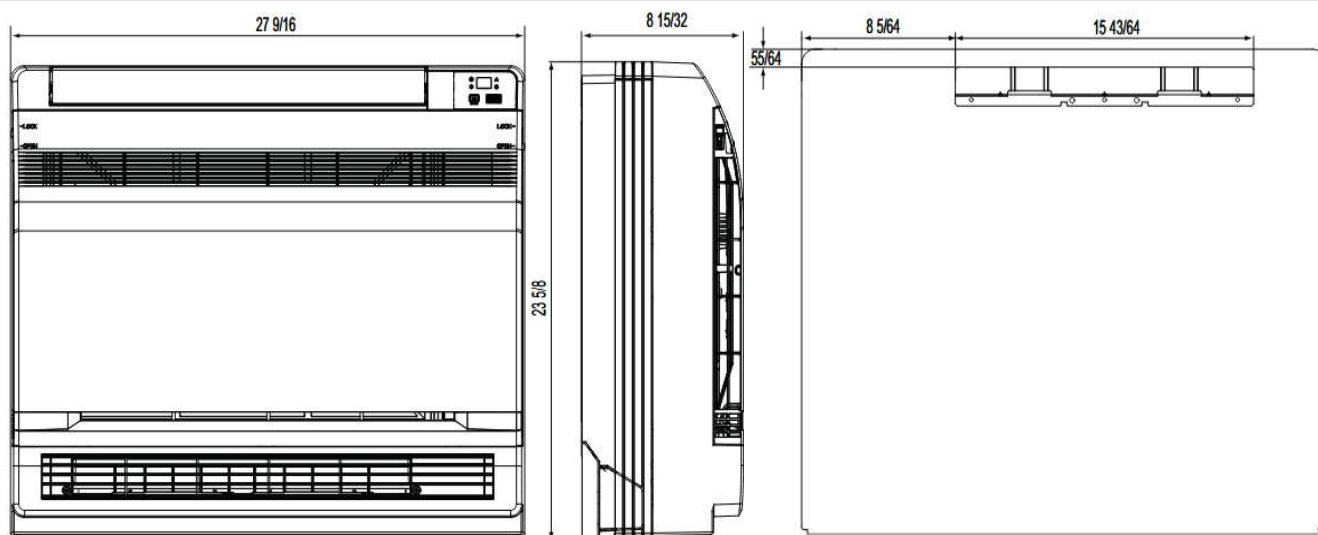

Minimum indoor unit clearances

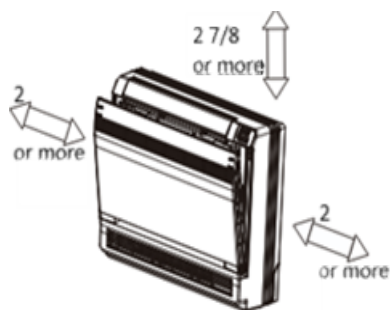

Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.52mm)
Drain pipe (Outer Diameter)	1.1in (28mm)

Included Features

Wi-fi	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
-------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.