

Medium

Med-low

Low

Sleep

1-Way Cassette

Indoor Unit Specifications

Air	dB (A)		
Turbo	412 CFM	700m3/h	43
High	353 CFM	600 m3/h	39
Med-high	n/a	n/a	n/a

294 CFM

n/a

265 CFM

n/a

KM18XK1DI

36

n/a

35

n/a

500 m3/h


n/a

450 m3/h


n/a

Net weight:	44.1 Lbs	Gross weight:	59.5 Lbs	
Not weight.	20 Kg		27 Kg	
Included:	Infrare	Infrared remote YBE1FB5F		
Dehumidificati	on level:	3.8 pt/hr		
Optional Accessories				
24V interlock w	vired controller:	XE71-00/E		
Wired controlle	er:	XE71-44G		
Embedded wire	ed controller:	XE74-44E		
Embedded WIF	I wired controller		XE72-44E	

Indoor unit Dimensions

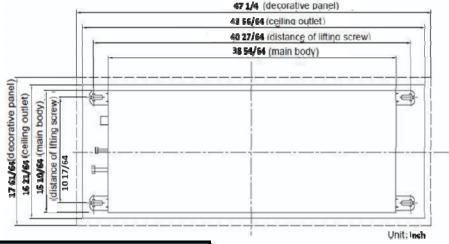

Minimum indoor unit clearances

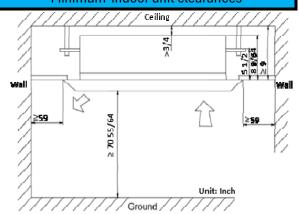

	Power supplied by outdoor unit				
	Additional Informa	Additional Information			
	Connection method	Screwed			
I	Liquid pipe	1/4in (6mm)			
I	Gas pipe	1/2in (12mm)			
I	Drain pipe (Outer Diameter)	1in (26mm)			
	Panel Net Weight	9.2 Lbs (4.2Kg)			
I	Panel Gross Weight	13.2 Lbs (6Kg)			

Included Features						
Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup