





Indoor Unit Specifications

1-Way Cassette			KM20XK1DI	
Air flow volume			dB (A)	
Turbo	441 CFM	750 m3/h	46	
High	383 CFM	650 m3/h	43	
Med-high	n/a	n/a	n/a	
Medium	324 CFM	550 m3/h	40	
Med-low	n/a	n/a	n/a	
Low	294 CFM	500 m3/h	36	
Sleep	n/a	n/a	n/a	
Indoor unit Dimensions				

Net weight:	44.1 Lbs	Gross weight:	59.5 Lbs
	20 Kg		27 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		4.23 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

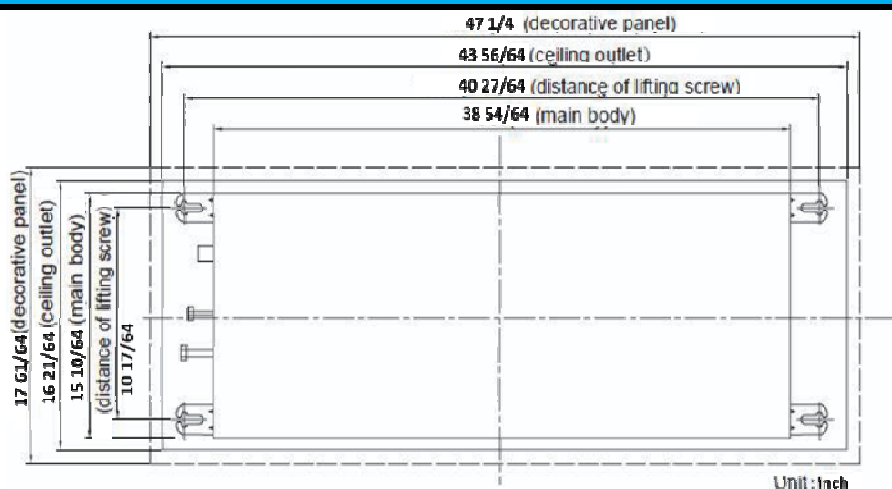

Minimum indoor unit clearances

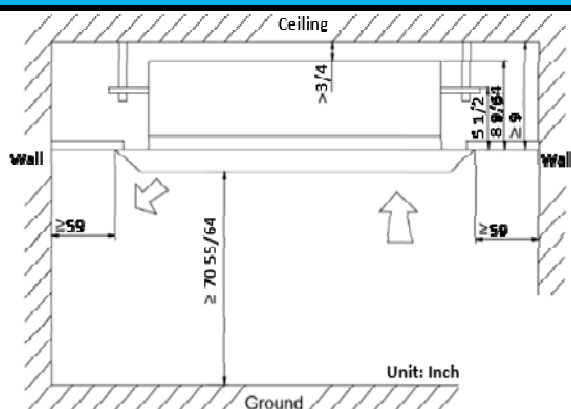

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	1/2in (12mm)
Drain pipe (Outer Diameter)	1in (26mm)
Panel Net Weight	9.2 Lbs (4.2Kg)
Panel Gross Weight	13.2 Lbs (6Kg)

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.