



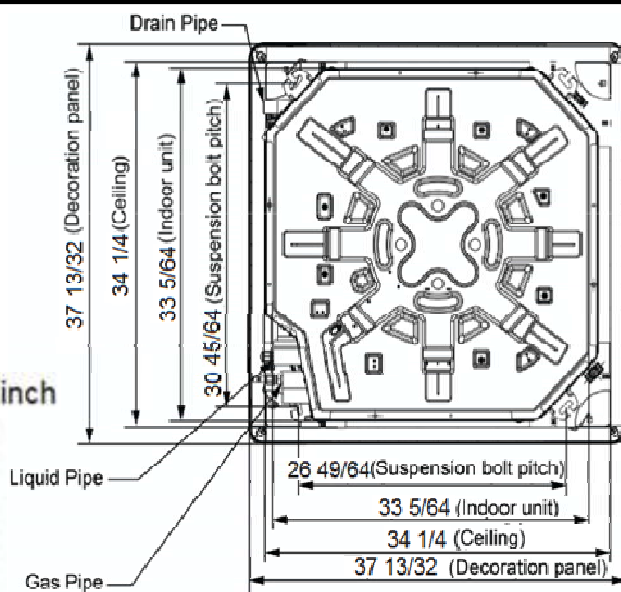

Indoor Unit Specifications


8-Way Cassette			KM24XK8DI	
Air flow volume			dB (A)	
Turbo	647 CFM	1100 m3/h	45	
High	618 CFM	1050 m3/h	44	
Med-high	559 CFM	950 m3/h	43	
Medium	536 CFM	910 m3/h	42	
Med-low	512 CFM	870 m3/h	41	
Low	488 CFM	830 m3/h	40	
Sleep	471 CFM	800 m3/h	39	
Indoor unit Dimensions				

Net weight:	63.9 Lbs	Gross weight:	83.8 Lbs
	29 Kg		38 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		5.28 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

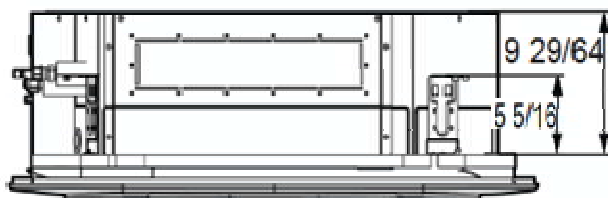

Minimum indoor unit clearances

Unit: inch

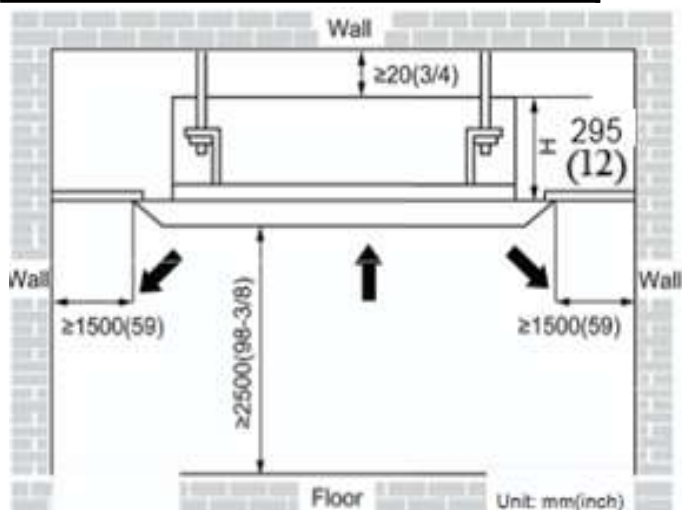

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	5/8in (16mm)
Drain pipe (Outer Diameter)	1in (25mm)
Panel Net Weight	13.2Lbs (6Kg)
Panel Gross Weight	20.9Lbs (9.5Kg)

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.