



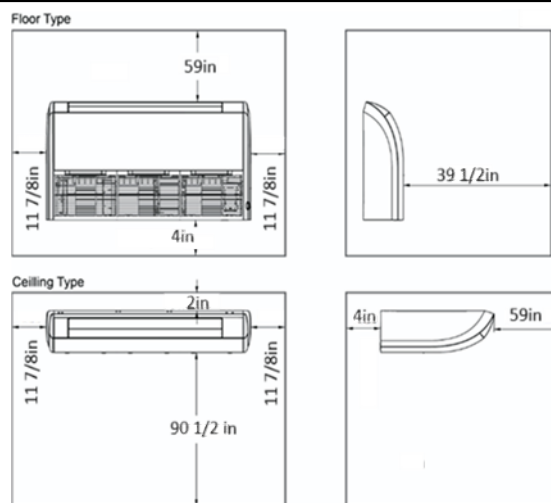

Indoor Unit Specifications

Floor Ceiling		KM24XTDI	
Air flow volume			dB (A)
Turbo	706 CFM	1200 m3/h	51
High	618 CFM	1050 m3/h	44
Med-high	N/A	N/A	N/A
Medium	530 CFM	900 m3/h	41
Med-low	N/A	N/A	N/A
Low	441 CFM	750 m3/h	38
Sleep	N/A	N/A	N/A
Indoor unit Dimensions			

Net weight:	72.7 Lbs	Gross weight:	88.2 Lbs
	33 Kg		38.5 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		2.5 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

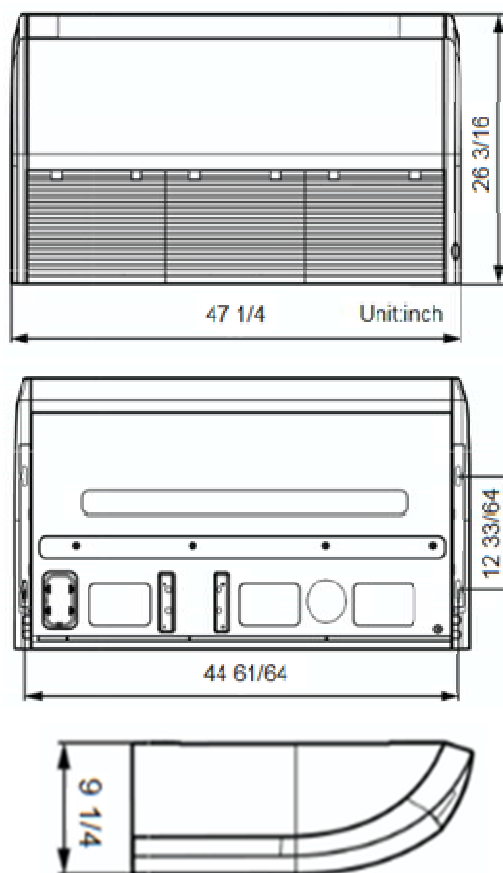

Minimum indoor unit clearances

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	5/8in (16mm)
Drain pipe (Outer Diameter)	3/4in (17mm)

Included Features

Dehumidify	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.