



## Submittal-36K Multizone

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

### Warranty information

Standard 7 years parts & compressor  
Registered 12 years parts & compressor  
Terms and conditions apply

### Type

Energy Star Heat Pump ☐

Cold Climate Energy Star Heat Pump ☒

### Model numbers

Indoor: All Ductless

Outdoor: KM36X6O

### Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	8870	36000	40900	AHRI NO.	Energy Star	nep
Heating:	8870	36000	51180	215708444	3,798,994.	

### Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
47F (8.3C)	8870	36000	43200	SEER2	21
17F (-8.3C)	9000	36000	37720	HSPF2	10
5F (-15C)	9000	36000	36000	EER (W/W)	3.52
				COP (W/W)	3.56

### Outdoor temperature range

Cooling:	-30-48C	-22-118F	Electrical	
Heating:	-30-24C	-22-75F	Power supply	208-230V/60Hz/1Ph
			Min/Max voltage	187-253Vac

### Condenser specifications

Connecting type	Screw Connection	MCA	30A
Pre-charge length	131ft (40M)	MOP	45A
MIN. Refrigerant Pipe Length	10 ft (3M)	Power Supply Wire	3/10 AWG
MAX. Height difference (Indoor/Indoor)	82ft (25M)	Interconnecting Wire	4/14 AWG

MAX. Height difference (Indoor/Outdoor)	82ft (25M)	Features:	
MAX. Length per Individual Indoor	82ft (25M)	Electronic expansion valve	
MAX. Refrigerant Pipe Length (Total)	262ft (80M)	Rotary compressor	
Refrigerant Type	R-32	Basepan heater	
Factory Charge	95oz	Compressor electric heater	

Additional Charge	0.2 oz/ft	Weight	
Sound Pressure Level	63dB (A)	Gross weight:	188Lbs (85.5Kg)
		Net weight:	173Lbs (78Kg)




R32



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.




# Outdoor Unit Dimensions

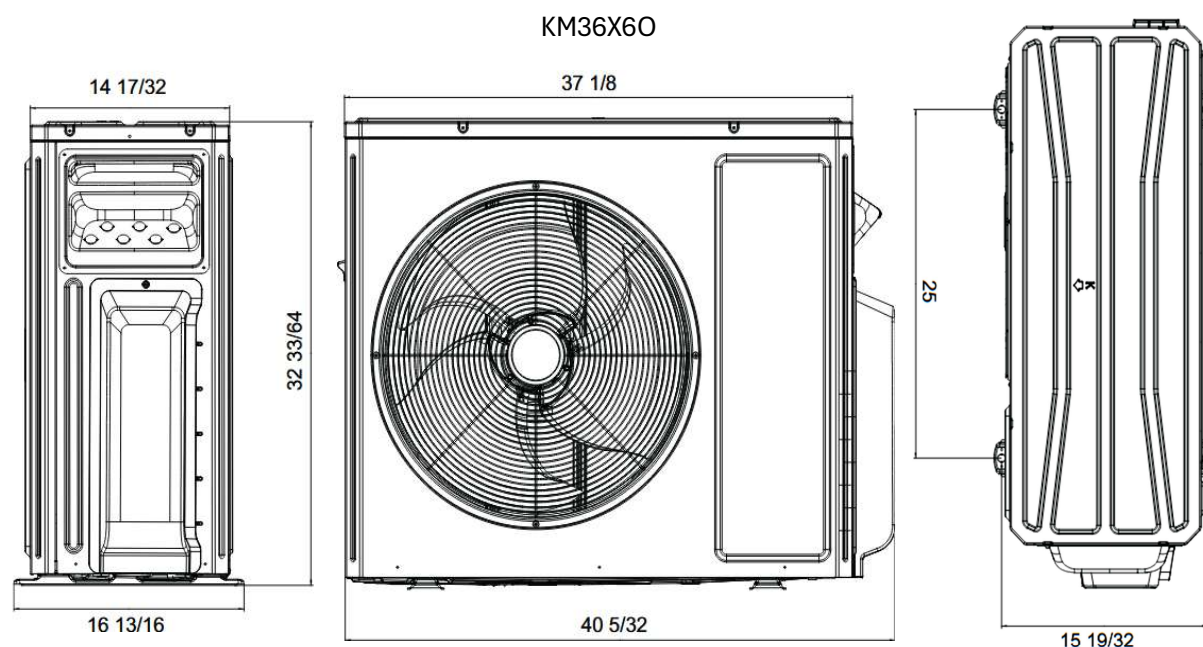

## Connection sizes

	Port 1	Port 2	Port 3	Port 4	Port 5
Liquid pipe	1/4in (6mm)	1/4in (6mm)	1/4in (6mm)	1/4in (6mm)	N/A
Gas pipe	3/8in (9.52mm)	3/8in (9.52mm)	3/8in (9.52mm)	3/8in (9.52mm)	N/A

## Minimum outdoor unit clearances

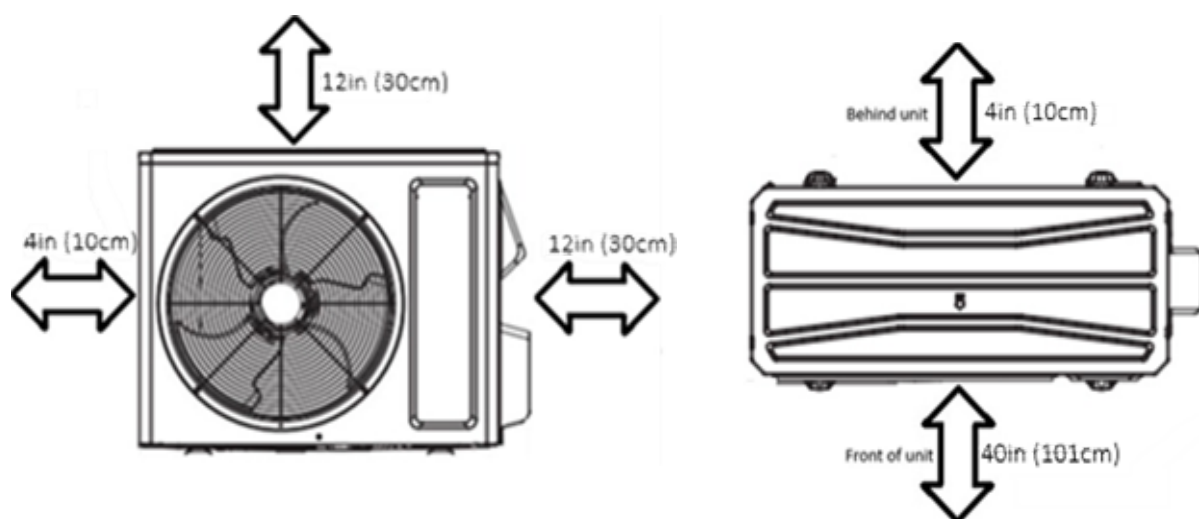

Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.