





Indoor Unit Specifications

1-Way Cassette			KM09XK1DI	
Air flow volume			dB (A)	
Turbo	324 CFM	550m3/h	37	
High	265 CFM	450 m3/h	35	
Med-high	n/a	n/a	n/a	
Medium	230 CFM	390 m3/h	32	
Med-low	n/a	n/a	n/a	
Low	200 CFM	340 m3/h	31	
Sleep	n/a	n/a	n/a	
Indoor unit Dimensions				

Net weight:	42.9 Lbs	Gross weight:	58.4 Lbs
	19.5 Kg		26.5 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		1.69 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

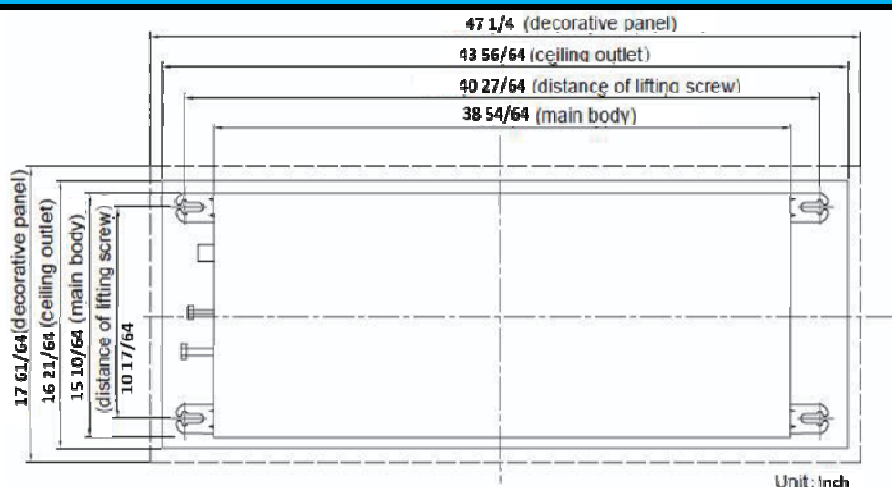

Minimum indoor unit clearances

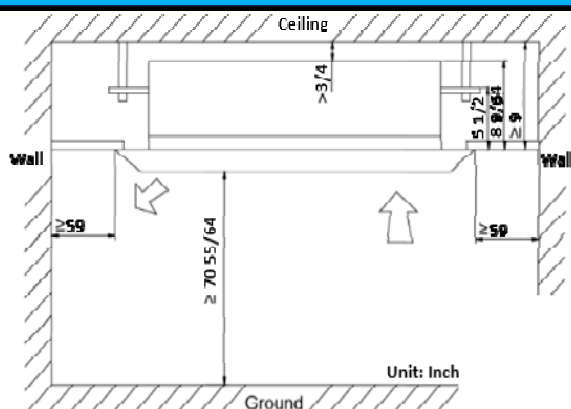

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.52mm)
Drain pipe (Outer Diameter)	1in (26mm)
Panel Net Weight	9.2 Lbs (4.2Kg)
Panel Gross Weight	13.2 Lbs (6Kg)

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.