



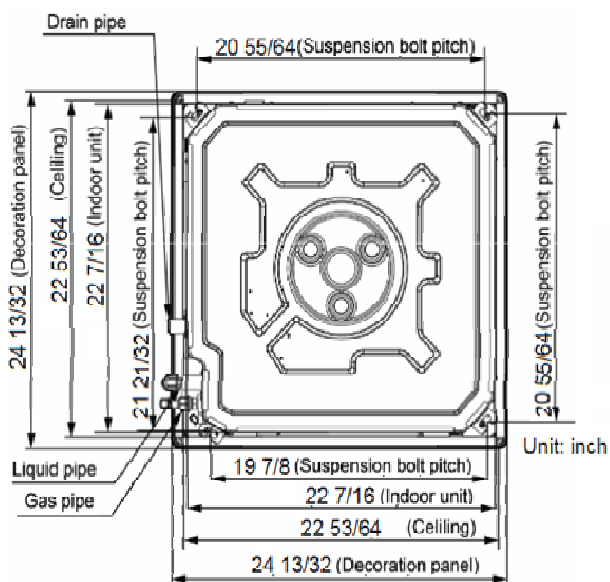


Indoor Unit Specifications

8-Way Cassette			KM09XK8DI	
Air flow volume			dB (A)	
Turbo	330 CFM	560 m3/h	40	
High	318 CFM	540 m3/h	39	
Med-high	288 CFM	490 m3/h	36	
Medium	265 CFM	450 m3/h	34	
Med-low	247 CFM	420 m3/h	33	
Low	224 CFM	380 m3/h	31	
Sleep	206 CFM	350 m3/h	29	
Indoor unit Dimensions				

Net weight:	37.5 Lbs	Gross weight:	48.5 Lbs
	17 Kg		22 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		2.96 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

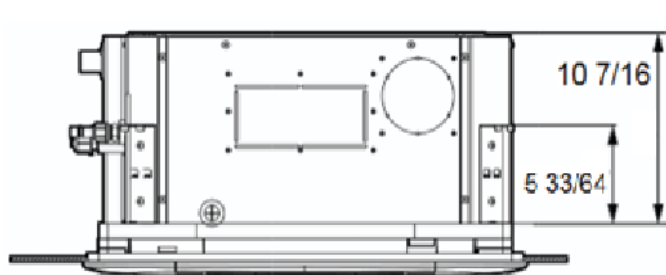

Minimum indoor unit clearances

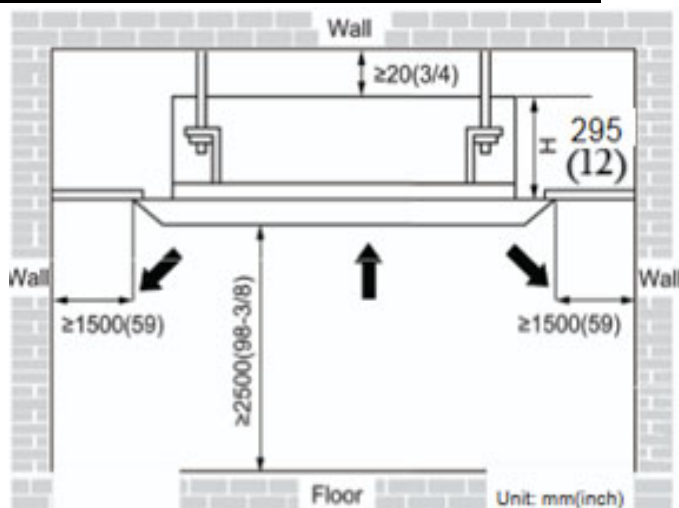

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3.8in (9.52mm)
Drain pipe (Outer Diameter)	3/4in (19mm)
Panel Net Weight	6.6Lbs (3Kg)
Panel Gross Weight	9.9Lbs (4.5Kg)

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.