




Indoor Unit Specifications


Console			KM09XEDI
Air flow volume			dB (A)
Turbo	383 CFM	650 m3/h	42
High	330 CFM	560 m3/h	39
Med-high	312 CFM	530 m3/h	37
Medium	282 CFM	480 m3/h	35
Med-low	253 CFM	430 m3/h	33
Low	218 CFM	370 m3/h	30
Sleep	188 CFM	320 m3/h	29

Net weight:	33 Lbs	Gross weight:	39.7 Lbs
	15.5 Kg		18.5 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:		1.69 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller		XE72-44E	

Indoor unit Dimensions

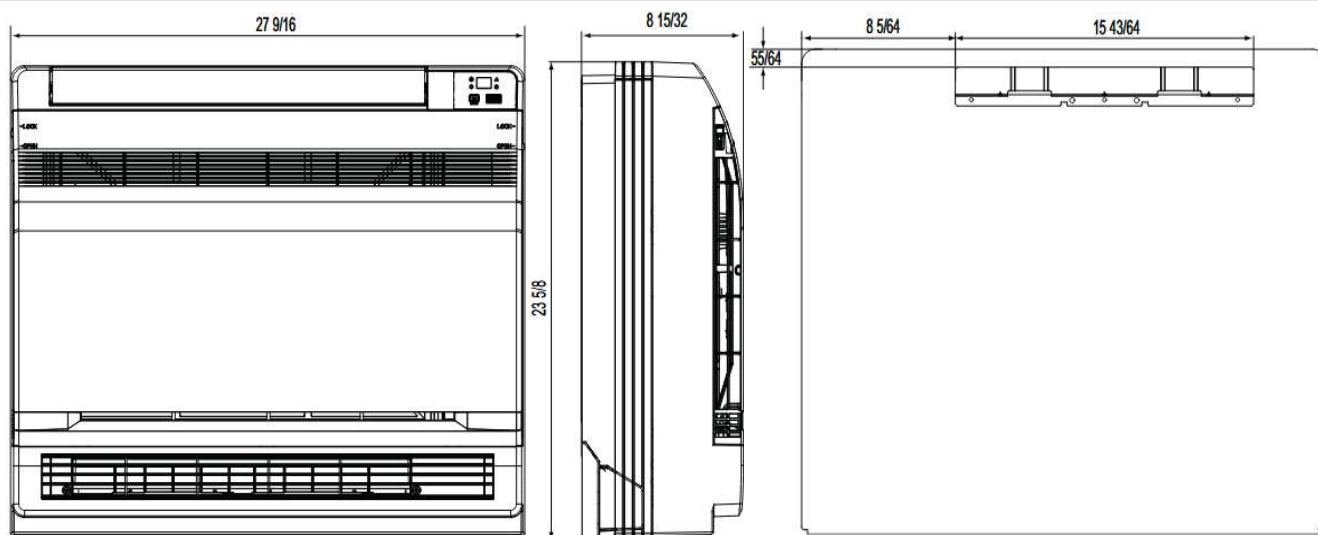

Minimum indoor unit clearances

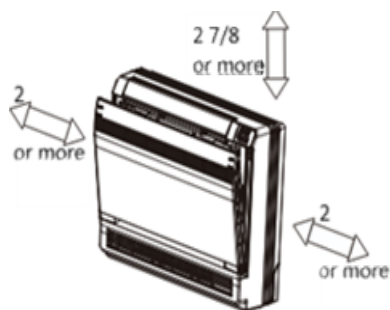

Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.52mm)
Drain pipe (Outer Diameter)	1.1in (28mm)

Included Features

Wi-fi	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
-------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.