







Indoor Unit Specifications

Ducted High Static		KM09XFDI	
Air flow volume			dB (A)
Turbo	324 CFM	550 m3/h	38
High	253 CFM	430 m3/h	30
Med-high	N/A	N/A	N/A
Medium	212 CFM	360 m3/h	26
Med-low	N/A	N/A	N/A
Low	188 CFM	320 m3/h	25
Sleep	N/A	N/A	N/A


Net weight:	70.5 Lbs	Gross weight:	83.8 Lbs
	32 Kg		38 Kg
Included:	Wired Controller XE72-44/E		
Dehumidification level:		1.69 pt/hr	
Optional Accessories			
24V interlock wired controller:		XE71-00/E	
Wired controller:		XE71-44G	
Embedded wired controller:		XE74-44E	
Embedded WIFI wired controller:		XE72-44E	

Indoor unit Dimensions

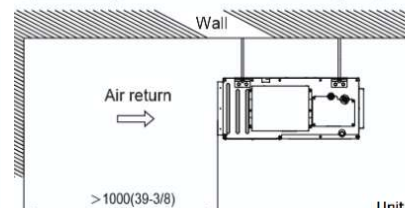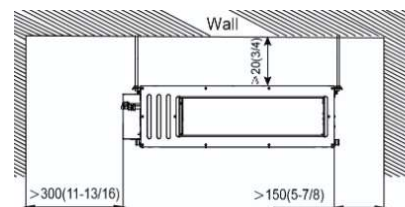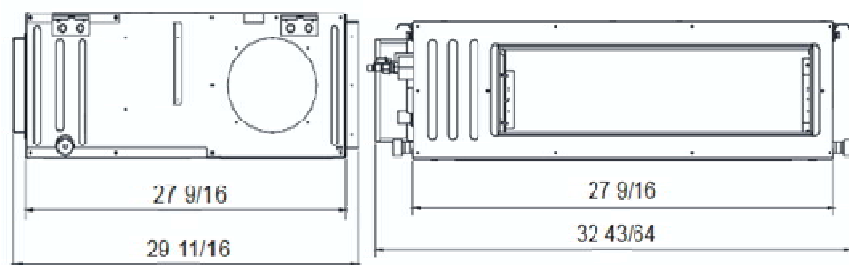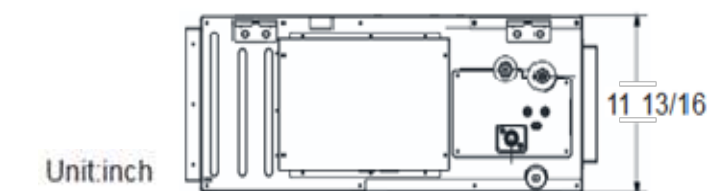

Unit: mm(in.)

Minimum indoor unit clearances

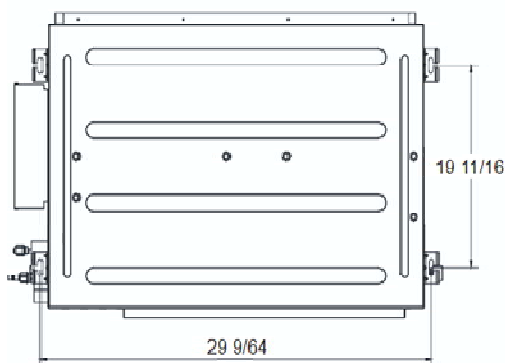

Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.56mm)
Drain pipe (Outer Diameter)	.98in (25mm)

Included Features

Drain pump	8C heating	Dehumidify	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	------------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.