



Mini-split Unit Submittal Data

PULAR

Job name:	Date:
Scheduled Reference:	Contractor:

System information



AHRI number	\	211151018
Outdoor Model	\	KW18HQ25SDO
Indoor Model	\	KW18HQ25SDI
System Rating		
Cooling Capacity	Btu/h	18000
Heating Capacity (47°F)	Btu/h	18000
Heating Capacity (17°F)	Btu/h	14600
Cooling Capacity Range	Btu/h	5118-21154
Heating Capacity Range	Btu/h	4436-21154
Power Supply	\	208-230V/1Ph/60Hz
SEER2	\	23
HSPF2	\	8.5
EER	W/W	3.66
COP	W/W	3.42
Gas Pipe	inch (mm)	5/8 (16)
Liquid Pipe	inch (mm)	1/4 (6)
Pre-Charge Length	ft (M)	24.6 (7.5)
MIN. Refrigerant Pipe Length	ft (M)	10 (3)
MAX. Refrigerant Pipe Length	ft (M)	100 (30)
MAX. Vertical Height difference between Indoor and Outdoor	ft (M)	66 (20)
Connection Method	\	Screw Connection
Refrigerant Type	\	R410A
Factory Charge	oz	54.7
Additional Charge	oz	0.2

Features:

Wi-fi

8C heating mode

I-feel function

Turbo mode

Self-clean function


Dehumidify





Outdoor Data and Dimensions




Outdoor Unit Data		
Compressor Type		Rotary
Compressor RLA	A	9.6
Sound Pressure Level	dB(A)	59
Min/Max Voltage	V	187-253
MCA	A	15
MOP	A	20
Dimension (HxWxD)	inch (mm)	25 63/64 x 37 46/64 x 15 53/64 (660 x 958 x 402)
Net Weight	lb (Kg)	95.9 (43.5)
Gross Weight	lb (Kg)	105.8 (48)
Operating Temperature for Cooling	°F/°C	-20~-122 (-29~50)
Operating Temperature for Heating	°F/°C	-22~86 (-30~30)

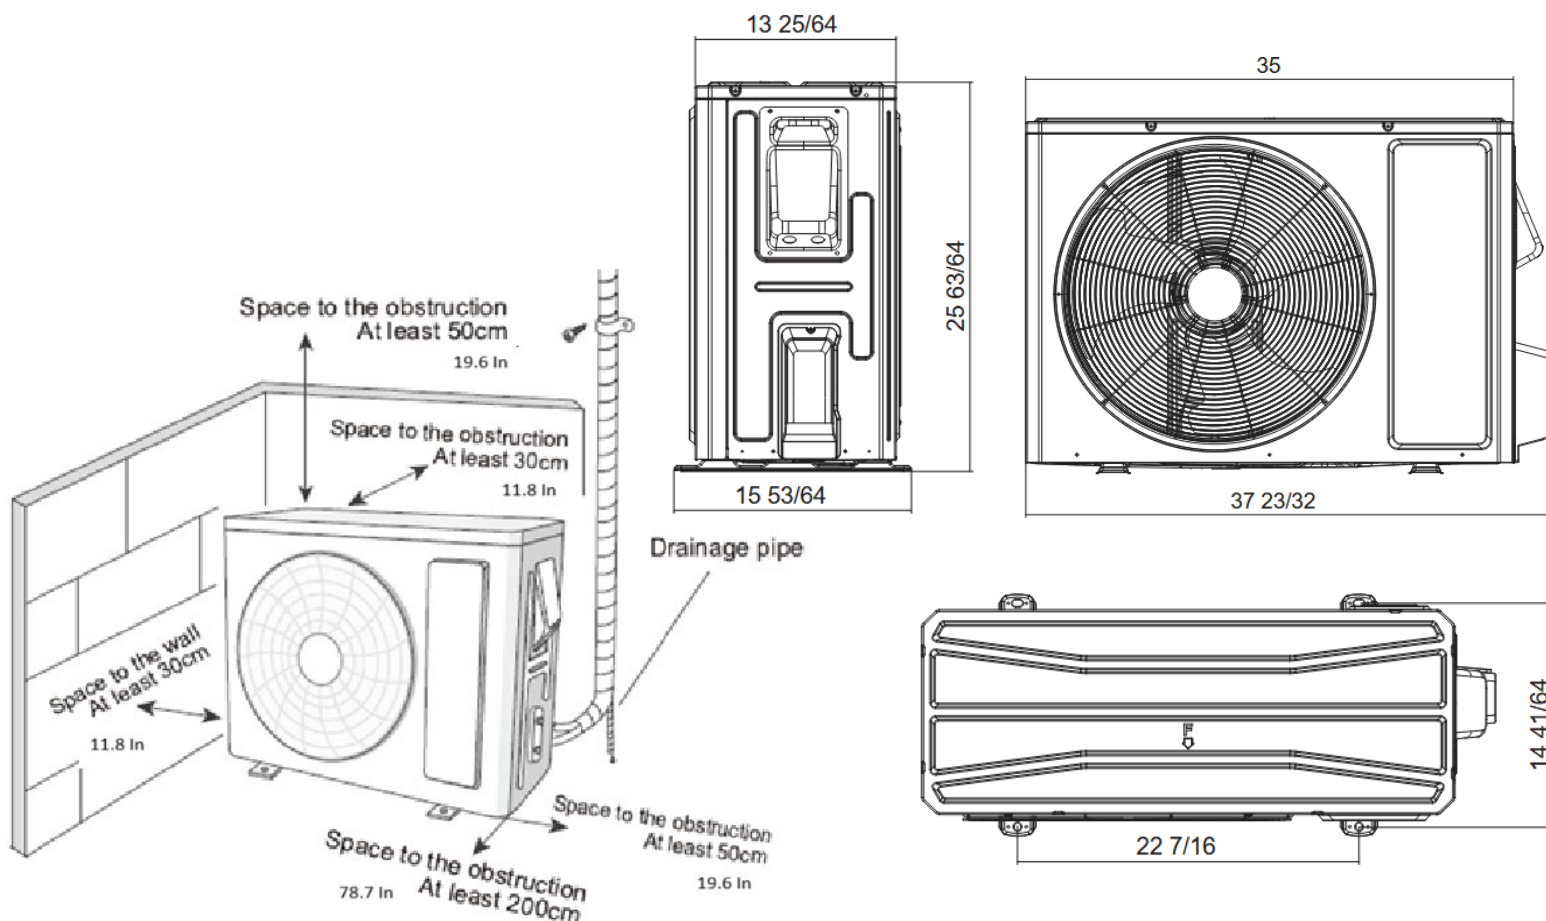



Indoor data and Dimensions

Indoor Unit Data		
Air Flow Volume	CFM (m ³ /h)	282-506 (480-860)
Sound Pressure Level	dB(A)	32-48
Dehumidification	pt/hr	3.8
Min/Max Voltage	V	187-253
MCA	A	-
MOP	A	-
Dimension (HxWxD)	inch (mm)	11 52/64 x 38 12/64 x 8 52/64 (300 x 970 x 224)
Net Weight	lb (Kg)	28.7 (13.5)
Gross Weight	lb (Kg)	35.3 (16)

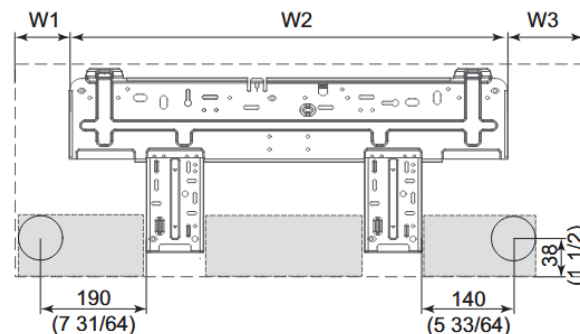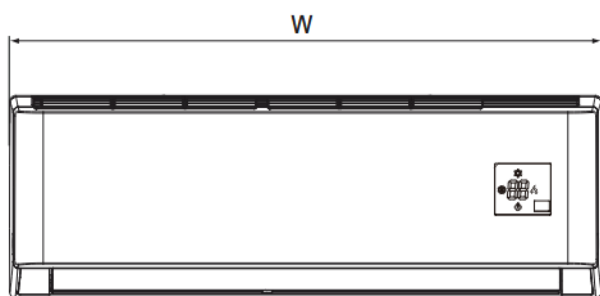

Unit:inch					
W	H	D	W1	W2	W3
38 3/16	11 13/16	8 55/64	4 3/32	26 31/32	7 1/8

