



Submittal-36K-UltraniXX

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star Heat Pump ☐

Cold Climate Energy Star Heat Pump ☒

Model numbers

Indoor: KD36UXI

Outdoor: KU36UXO

Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	18000	34000	37000	AHRI NO.	Energy Star	nep
Heating:	18000	34000	38000	217194945	4,011,418.	

Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
47F (8.3C)	11200	34000	34400	SEER2	16
17F (-8.3C)	9200	28200	29600	HSPF2	9.5
5F (-15C)	16000	34000	34000	EER (W/W)	3.3
				COP (W/W)	3.3

Outdoor temperature range

Cooling:	-15-54C	5-129F	Electrical	
Heating:	-30-24C	-22-75F	Power supply	208-230V/60Hz/1Ph
			Min/Max voltage	187-253Vac

Condenser specifications

Connecting type	Screw Connection	MCA	27A
Pre-charge length	25ft (7.5M)	MOP	30A
MIN. Refrigerant Pipe Length	10 ft (3M)	Power Supply Wire	10/3 AWG
		Interconnecting Wire	18/6AWG or 18/2AWG

Liquid Pipe Size	3/8in (9.52mm)	Features:	
Gas Pipe Size	3/4in (19mm)	Electronic expansion valve	
Max Height Between Indoor/Outdoor	50ft (15M)	Rotary compressor	
Max. Pipe Length	100ft (30M)	Basepan heater	
Refrigerant Type	R-32	Compressor electric heater	

Factory Charge	102.3oz	Weight	
Additional Charge	0.3 oz/ft	Gross weight:	211.6Lbs (96Kg)
Sound Pressure Level	61dB (A)	Net weight:	187.4Lbs (85Kg)




Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.




Outdoor Unit Dimensions

KU36UXO

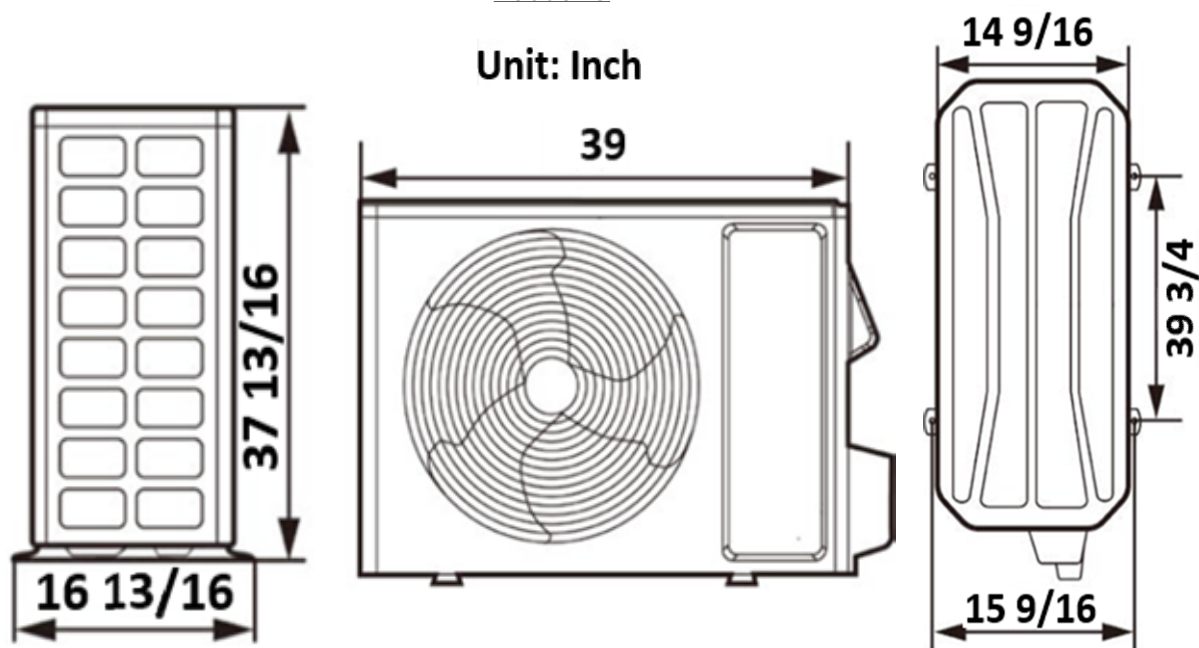

Minimum outdoor unit clearances

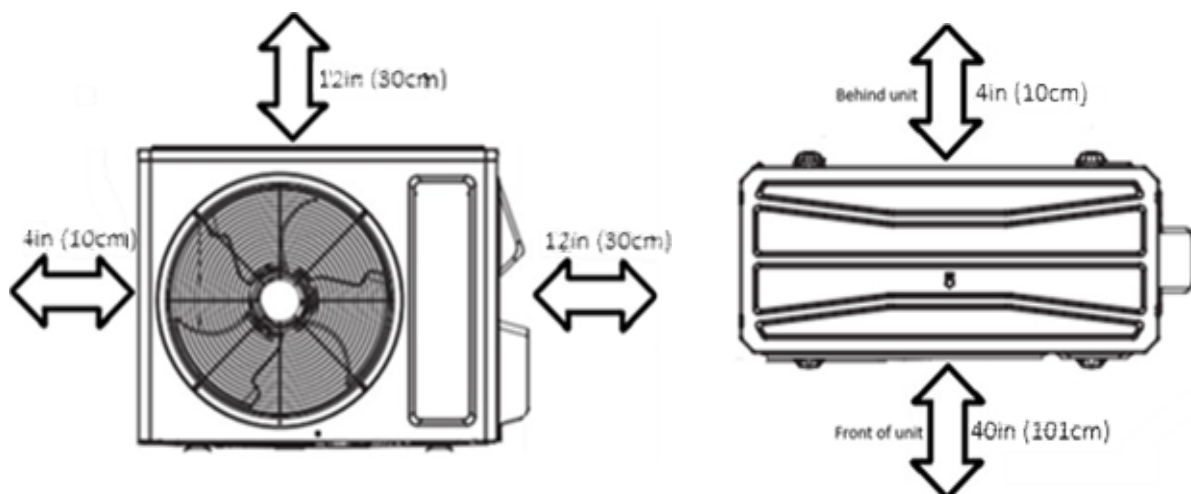

Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.



Indoor Unit Specifications


KD36UXI

Unit: Inch

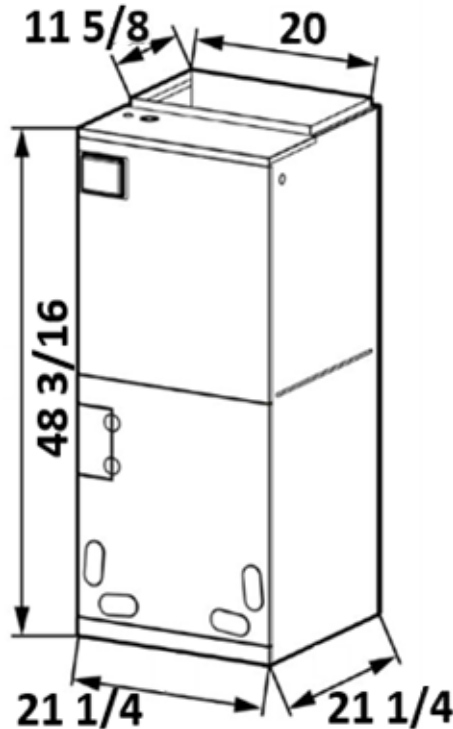

Technical Specifications	
Power Supply	208-230V/60Hz/1Ph
Sound pressure level	51dB(A)
MCA	5.3A
MOC	15A
Dehumidification	6.02 pt/hr
Net weight	163.1 lbs (74Kg)
Gross Weight	178.6 Lbs (81Kg)
Drain Pipe Outlet	SCH 40 3/4
*When there is no Electrical Heater installed There is no supplied Electrical breaker	
*If Electrical Heater is installed it will supply power to air handler	

Optional Smart thermostat	Electric Heater kits available					
WK-010WC01 and WK-010WD1	Model number	KW	MCA 240V	MCA 208V	MOC 240V	MOC 208V
* Metal mesh filter included	21-4227-01	5	26A	22.6A	30A	25A
19 1/4 x 20 1/4 x 1/2	21-4216-03	10	52A	45A	60A	45A
Fan Performance	21-4217-01	15	52A & 26A	45A & 22.6A	60A & 30A	45A & 25A

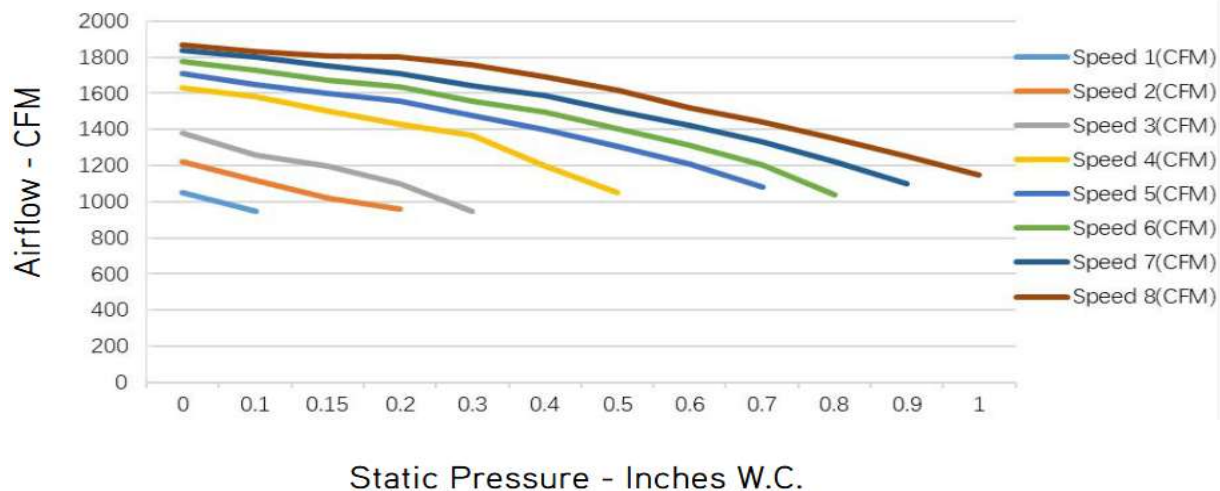

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.