




# Indoor unit specifications

## 8-Way Cassette KM12XK8DI


Air flow volume		dB (A)	
Turbo	330 CFM	560 m3/h	40
High	318 CFM	540 m3/h	39
Med-high	288 CFM	490 m3/h	36
Medium	265 CFM	450 m3/h	34
Med-low	247 CFM	420 m3/h	33
Low	224 CFM	380 m3/h	31
Sleep	206 CFM	350 m3/h	29

Net weight:	37.5 Lbs 17 Kg	Gross weight:	48.5 Lbs 22 Kg
Included: Infrared remote YBE1FB5F			
Dehumidification level: 2.96 pt/hr			
Optional Accessories			
24V interlock wired controller: XE71-00/E			
Wired controller: XE71-44G			
Embedded wired controller: XE74-44E			
Embedded WIFI wired controller XE72-44E			

## Indoor unit Dimensions

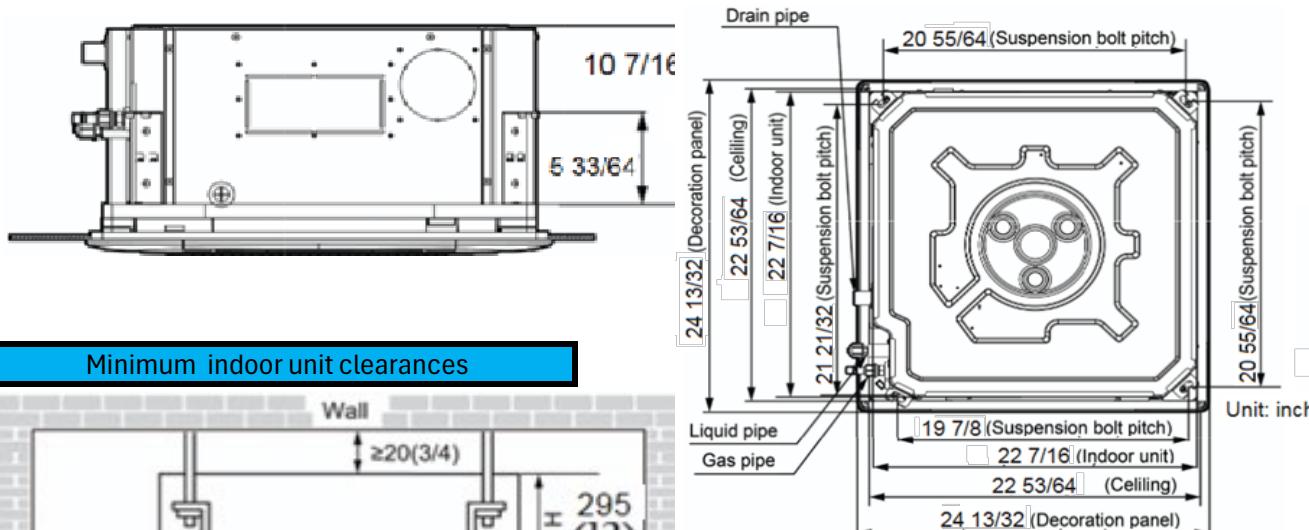

## Minimum indoor unit clearances

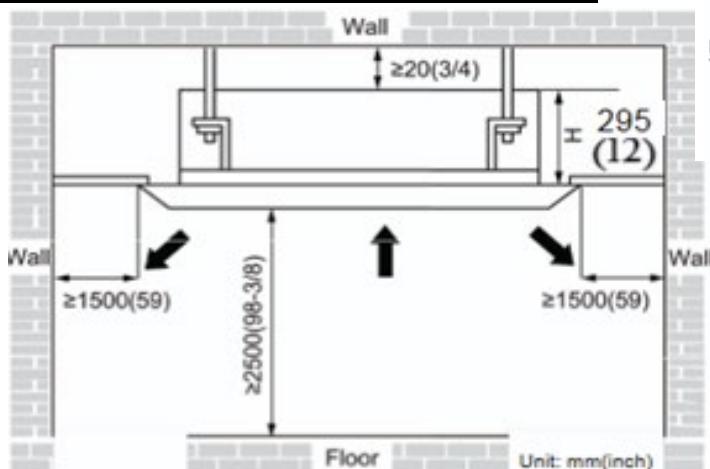

## Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3.8in (9.52mm)
Drain pipe (Outer Diameter)	3/4in (19mm)
Panel Net Weight	6.6Lbs (3Kg)
Panel Gross Weight	9.9Lbs (4.5Kg)

## Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------