





Indoor unit specifications


8-Way Cassette		KM18XK8DI	
Air flow volume		dB (A)	
Turbo	383 CFM	650 m3/h	44
High	318 CFM	540 m3/h	40
Med-high	288 CFM	490 m3/h	37
Medium	265 CFM	450 m3/h	35
Med-low	247 CFM	420 m3/h	34
Low	224 CFM	380 m3/h	32
Sleep	206 CFM	350 m3/h	30

Net weight:	37.5 Lbs	Gross weight:	48.5 Lbs
	17 Kg		22 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:	3.08 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller	XE72-44E		

Indoor unit Dimensions

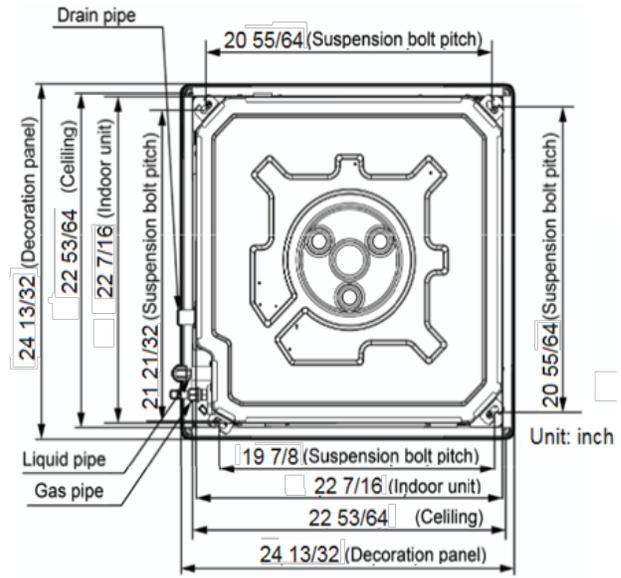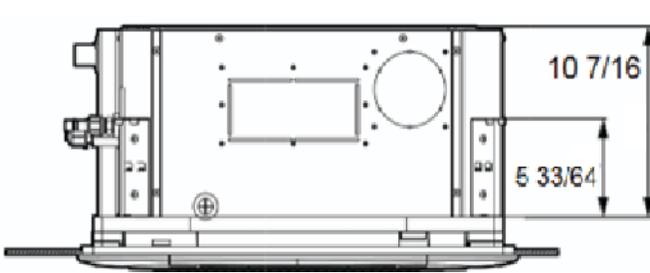

Minimum indoor unit clearances

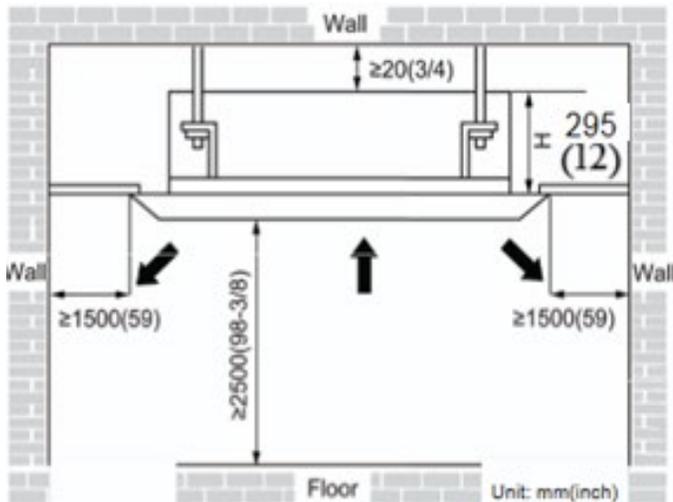

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	1/2in (12mm)
Drain pipe (Outer Diameter)	3/4in (19mm)
Panel Net Weight	6.6Lbs (3Kg)
Panel Gross Weight	9.9Lbs (4.5Kg)

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.