





Indoor unit specifications

8-Way Cassette		KM24XK8DI	
Air flow volume		dB (A)	
Turbo	647 CFM	1100 m3/h	45
High	618 CFM	1050 m3/h	44
Med-high	559 CFM	950 m3/h	43
Medium	536 CFM	910 m3/h	42
Med-low	512 CFM	870 m3/h	41
Low	488 CFM	830 m3/h	40
Sleep	471 CFM	800 m3/h	39


Net weight:	63.9 Lbs 29 Kg	Gross weight:	83.8 Lbs 38 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:	5.28 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller	XE72-44E		

Indoor unit Dimensions

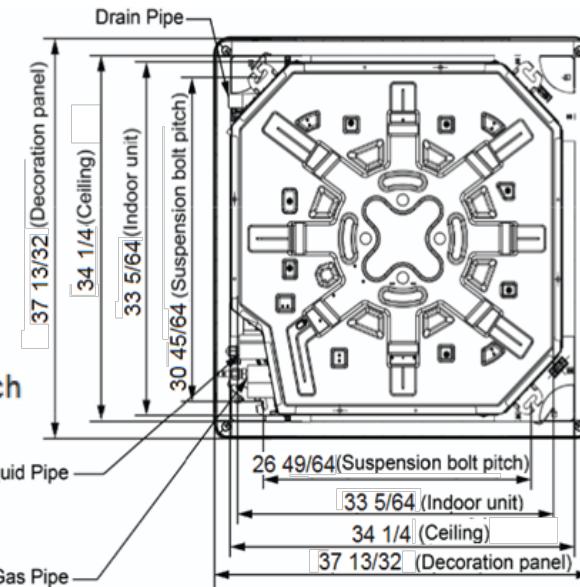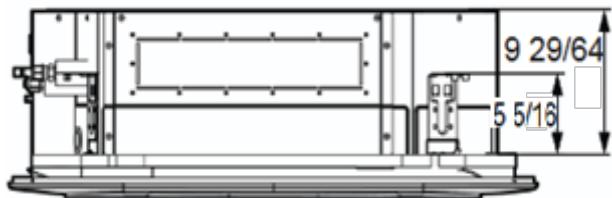

Minimum indoor unit clearances

Unit: inch

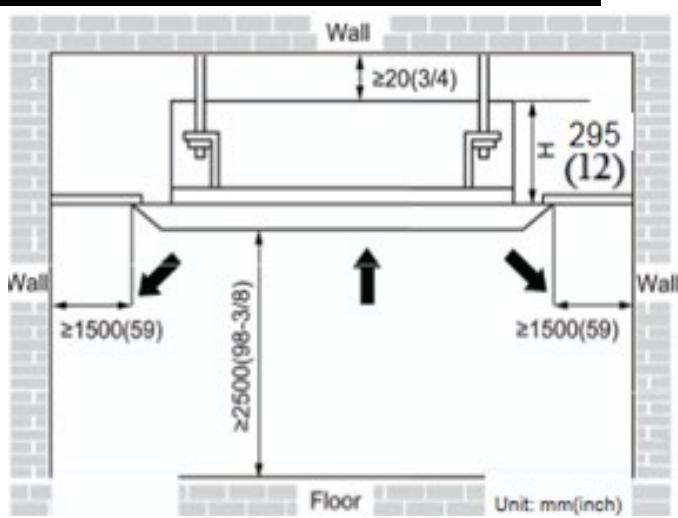

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	5/8in (16mm)
Drain pipe (Outer Diameter)	1in (25mm)
Panel Net Weight	13.2Lbs (6Kg)
Panel Gross Weight	20.9Lbs (9.5Kg)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.