




Indoor unit specifications


1-Way Cassette		KM09XK1DI	
Air flow volume		dB (A)	
Turbo	324 CFM	550m3/h	37
High	265 CFM	450 m3/h	35
Med-high	n/a	n/a	n/a
Medium	230 CFM	390 m3/h	32
Med-low	n/a	n/a	n/a
Low	200 CFM	340 m3/h	31
Sleep	n/a	n/a	n/a

Net weight:	42.9 Lbs 19.5 Kg	Gross weight:	58.4 Lbs 26.5 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:	1.69 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller	XE72-44E		

Indoor unit Dimensions

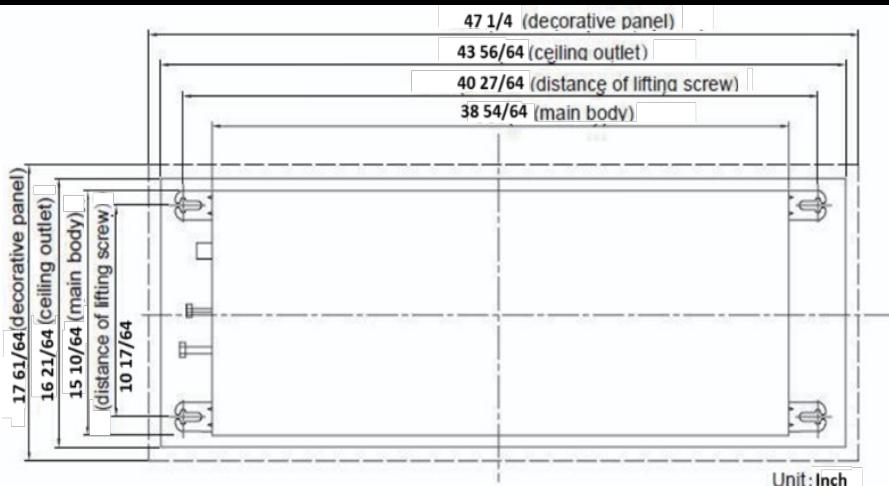

Minimum indoor unit clearances

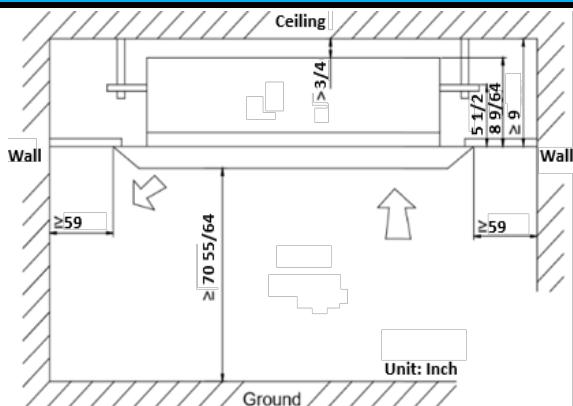

Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.52mm)
Drain pipe (Outer Diameter)	1in (26mm)
Panel Net Weight	9.2 Lbs (4.2Kg)
Panel Gross Weight	13.2 Lbs (6Kg)

Included Features

Water pump	8C heating	I-feel	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	--------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.