



Submittal-60K-Ultranixx


Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information	
Standard 7 years parts & compressor	
Registered 12 years parts & compressor	
Terms and conditions apply	
Type	
Energy Star	
Cold Climate Energy Star	
Model numbers	
Indoor:	KCAC60HI
Outdoor:	KU60UXO
Capacity range	

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	15200	52000	53100	AHRI NO.	Energy Star	neep
Heating:	14400	54000	54000	217603526	-	

Heating performance				Efficiency Ratings	
Output (BTU/H)	Minimum	Rated	Max	SEER2	16
47F (8.3C)	14400	54000	54000	HSPF2	9
17F (-8.3C)	7800	35200	35600	EER2	9.8
5F (-15C)	18900	40000	40000	COP	3.1


Outdoor temperature range		Electrical	
Cooling:	-15-54C	5-129F	Power supply
Heating:	-30-24C	-22-75F	Min/Max voltage
Condenser specifications		MCA	39A
Connecting type		MOP	45A
Pre-charge length		Power Supply Wire	8/2 AWG
MIN. Refrigerant Pipe Length		Interconnecting Wire	18/6AWG or 18/2AWG
Liquid Pipe Size		Features	
Gas Pipe Size		Electronic expansion valve	
Max Height Between Indoor/Outdoor		Rotary compressor	
Max. Pipe Length		Basepan heater	
Refrigerant Type		Compressor electric heater	
Factory Charge		Weight	
Additional Charge		Gross weight:	263.5Lbs (119.5Kg)
Sound Pressure Level		Net weight:	241.4Lbs (109.5Kg)

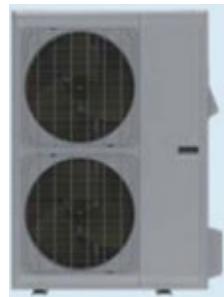


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.



Outdoor unit Dimensions

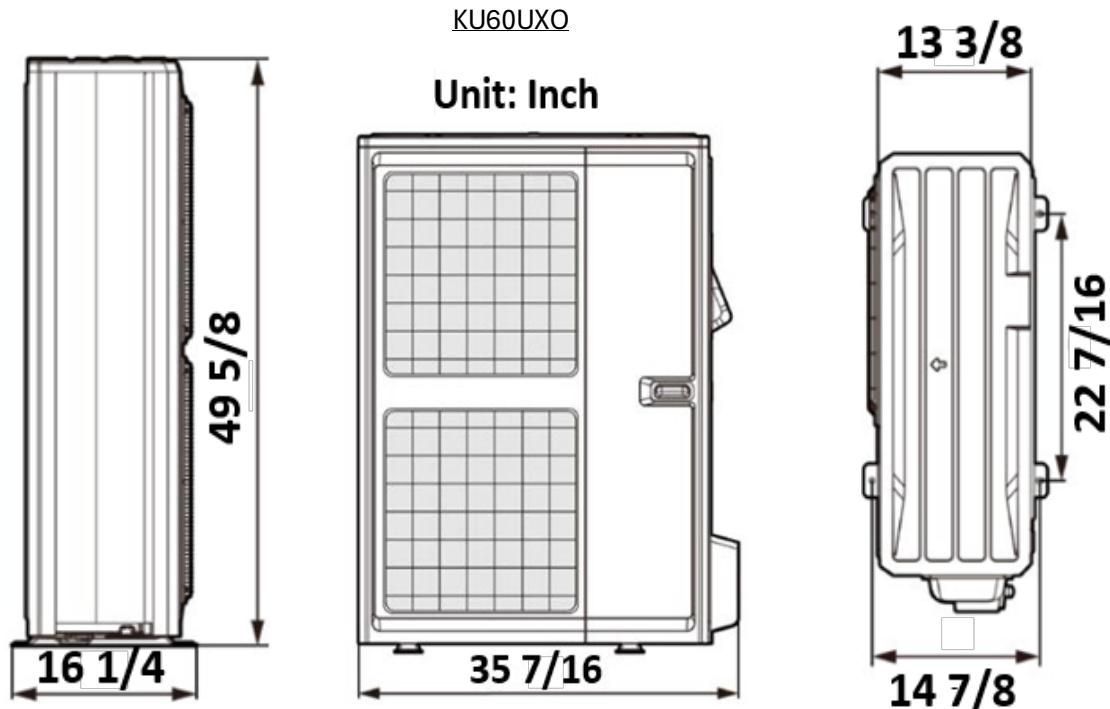

Minimum outdoor unit clearances

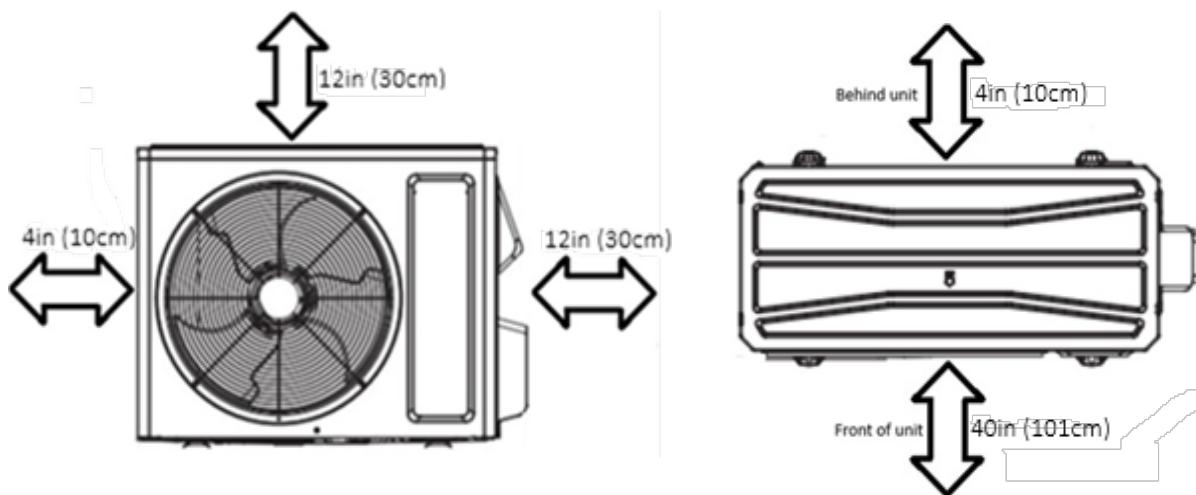

Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.





Indoor unit specifics

KCAC60HI

Move to the left:

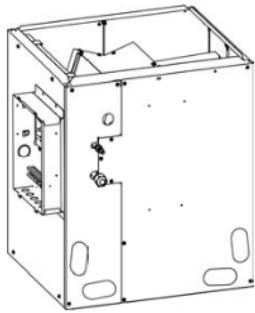

Move to the right:

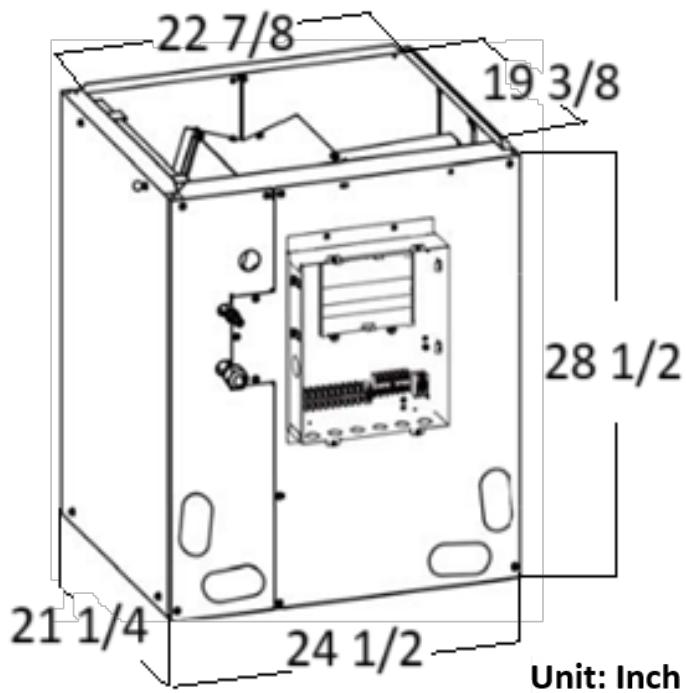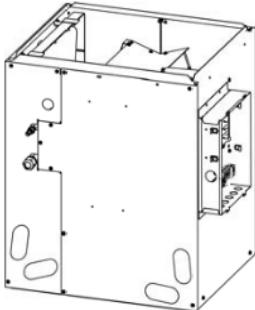

Control board can be moved according to installation needs

Optional Smart thermostat	Technical Specifications	
WK-010WC01 and WK-010WD1	Power Supply	24V/60Hz/1Ph
	Throttling method	Electronic Expansion Valve
	Connection method	Screwed
	Liquid pipe size	3/8in (9.52mm)
	Gas pipe size	3/4in (19mm)
	Net weight	110 lbs (50Kg)
	Gross Weight	123.5 Lbs (56Kg)
	Drain Pipe Outlet	SCH 40 3/4
Includes R32 Refrigerant Sensor		
Can be installed horizontally		

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.