




Indoor unit specification

Ducted High Static		KM12XFDI	
Air flow volume			dB (A)
Turbo	353 CFM	600 m3/h	39
High	288 CFM	490 m3/h	32
Med-high	N/A	N/A	N/A
Medium	247 CFM	420 m3/h	26
Med-low	N/A	N/A	N/A
Low	212 CFM	360 m3/h	25
Sleep	N/A	N/A	N/A

Net weight:	70.5 Lbs	Gross weight:
	32 Kg	
Included:	Wired Controller XE72	
Dehumidification level:	2.9	
Optional Accessories		
24V interlock wired controller:	XE7	
Wired controller:	XE7	
Embedded wired controller:	XE7	
Embedded wired controller:	XE72-4	

Indoor unit Dimensions

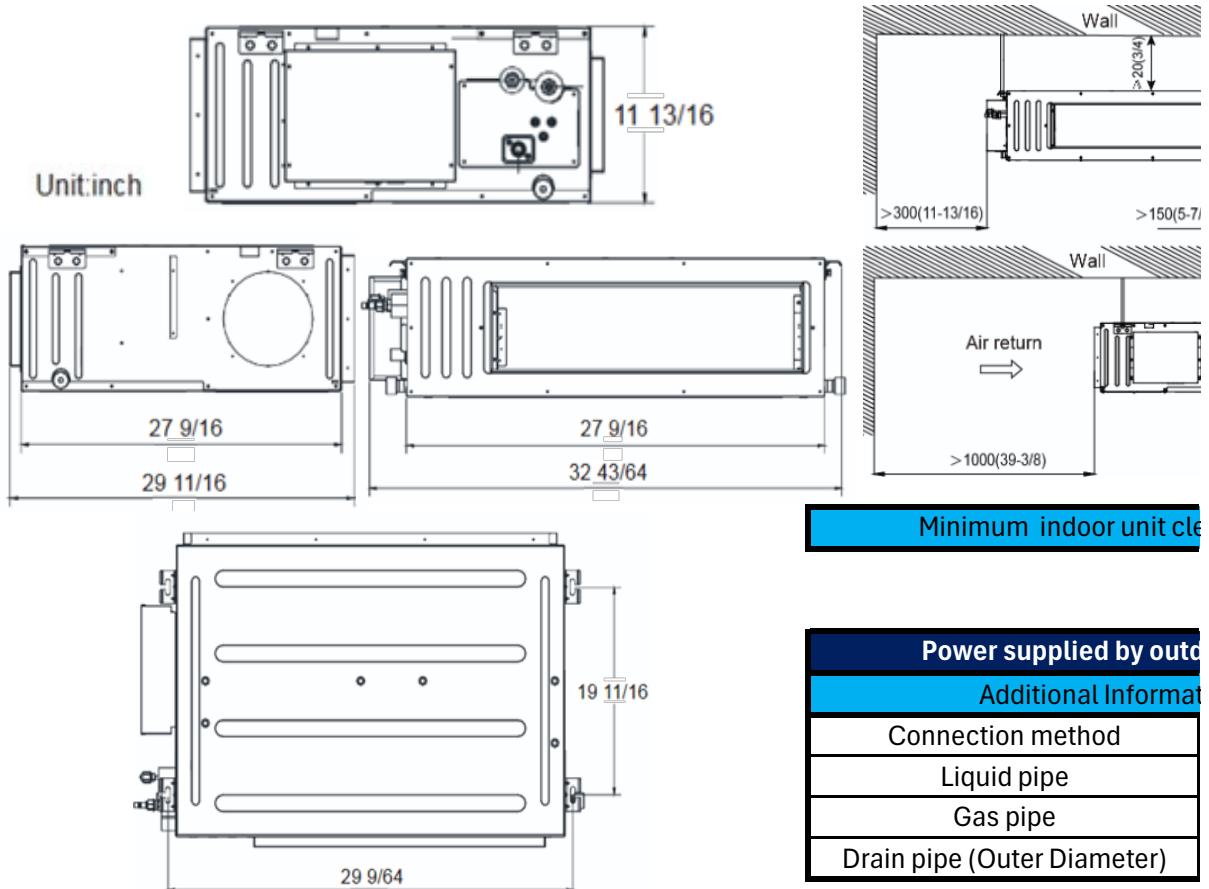


Included Features

Drain pump	8C heating	Dehumidfy	Self clean	Forced defrost	Soft start	Low volt
------------	------------	-----------	------------	----------------	------------	----------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

1S

83.8 Lbs
38 Kg
2-44/E
6 pt/hr
'1-00/E
71-44G
74-44E
44E (WIFI)

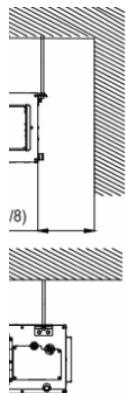

Unit: mm(in.)

Clearances

Door unit
Mounting
Screwed
1/4in (6mm)
3/8in (9.56mm)
.98in (25mm)
Base plate
Base plate startup

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.