




Indoor unit specifications




Ducted High Static KM18XFDI			
Air flow volume		dB (A)	
Turbo	589 CFM	1000 m3/h	40
High	412 CFM	700 m3/h	32
Med-high	N/A	N/A	N/A
Medium	312 CFM	530 m3/h	26
Med-low	N/A	N/A	N/A
Low	288 CFM	490 m3/h	25
Sleep	N/A	N/A	N/A

Net weight:	92.6 Lbs 42 Kg	Gross weight:	106.9 Lbs 48.5 Kg
Included:	Wired Controller XE72-44/E		
Dehumidification level:	3.80 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller:	XE72-44E		

Indoor unit Dimensions

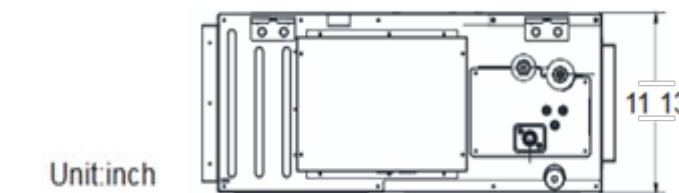


Unit:inch

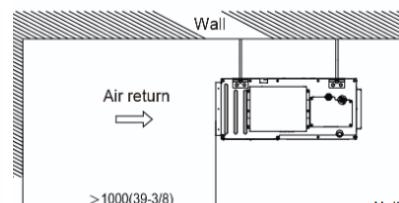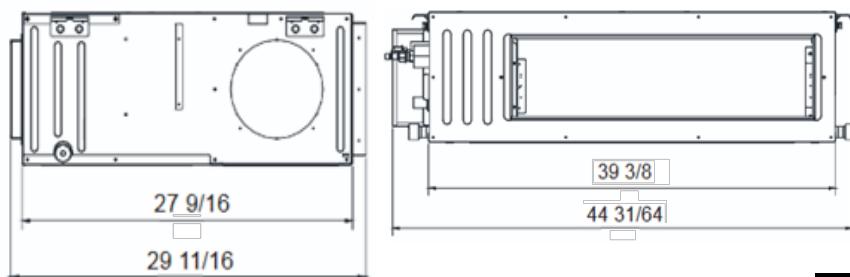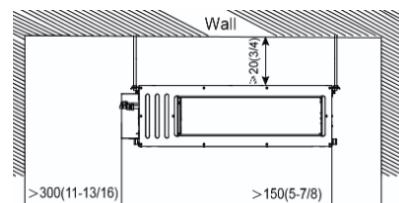

Unit: mm(in.)

Minimum indoor unit clearances

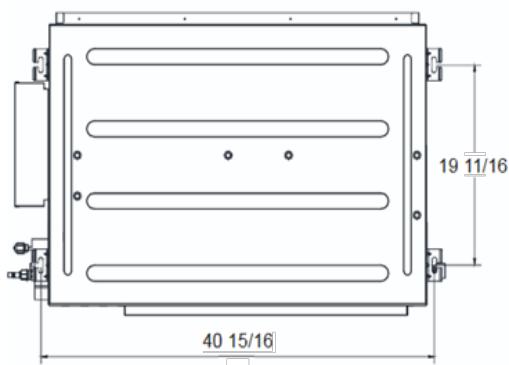

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	5/8in (16mm)
Drain pipe (Outer Diameter)	.98in (25mm)

Included Features

Drain pump	8C heating	Dehumidfy	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	-----------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.