





Indoor unit specifications

Ducted High Static KM30XFDI			
Air flow volume		dB (A)	
Turbo	883 CFM	1500 m3/h	45
High	736 CFM	1250 m3/h	40
Med-high	N/A	N/A	N/A
Medium	677 CFM	1150 m3/h	38
Med-low	N/A	N/A	N/A
Low	647 CFM	1100 m3/h	36
Sleep	N/A	N/A	N/A

Net weight:	66.2 Lbs 30 Kg	Gross weight:	77.2 Lbs 35 Kg
Included:	Wired Controller XE72-44/E		
Dehumidification level:	7.40 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller:	XE72-44E		

Indoor unit Dimensions

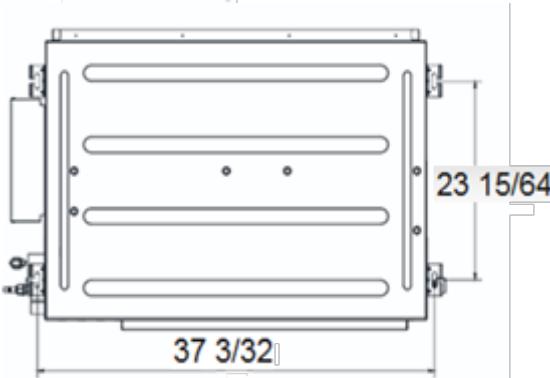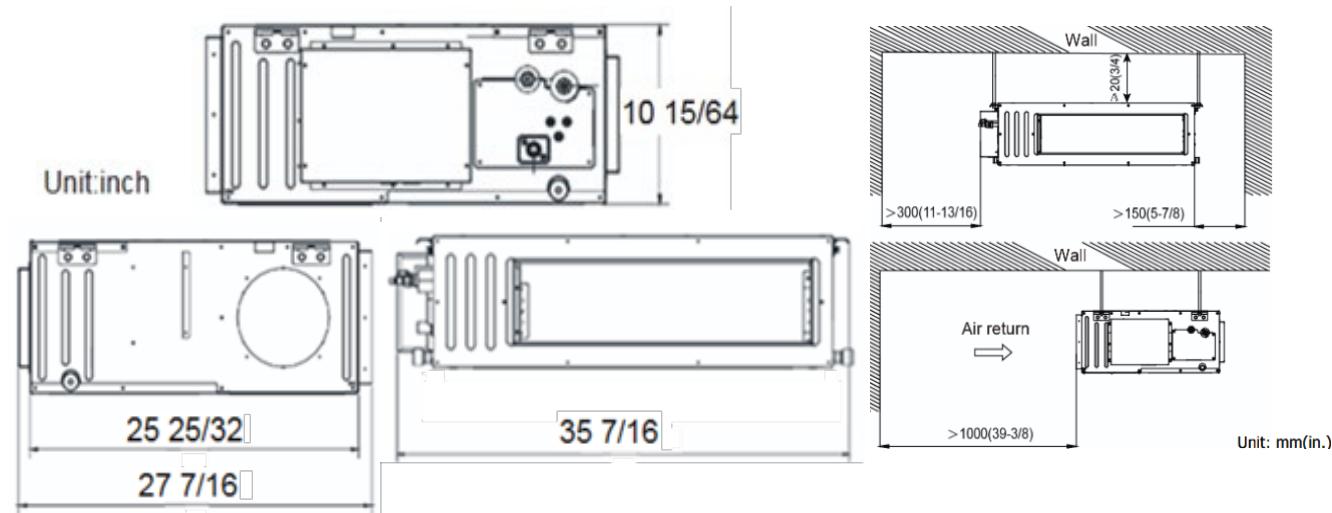

Power supplied by outdoor unit	
Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	5/8in (16mm)
Drain pipe (Outer Diameter)	1.02in (26mm)

Included Features

Drain pump	8C heating	Dehumidfy	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	-----------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.