





# Indoor unit specifications

Ducted High Static KM36XFDI			
Air flow volume		dB (A)	
Turbo	1324 CFM	2250 m3/h	43
High	942 CFM	16000 m3/h	41
Med-high	N/A	N/A	N/A
Medium	912 CFM	1550 m3/h	39
Med-low	N/A	N/A	N/A
Low	853 CFM	1450 m3/h	38
Sleep	N/A	N/A	N/A

Net weight:	94.8 Lbs 43 Kg	Gross weight:	108 Lbs 49 Kg
Included:	Wired Controller XE72-44/E		
Dehumidification level:	7.82 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller:	XE72-44E		

## Indoor unit Dimensions

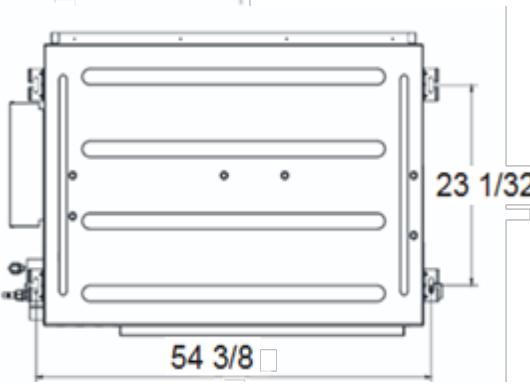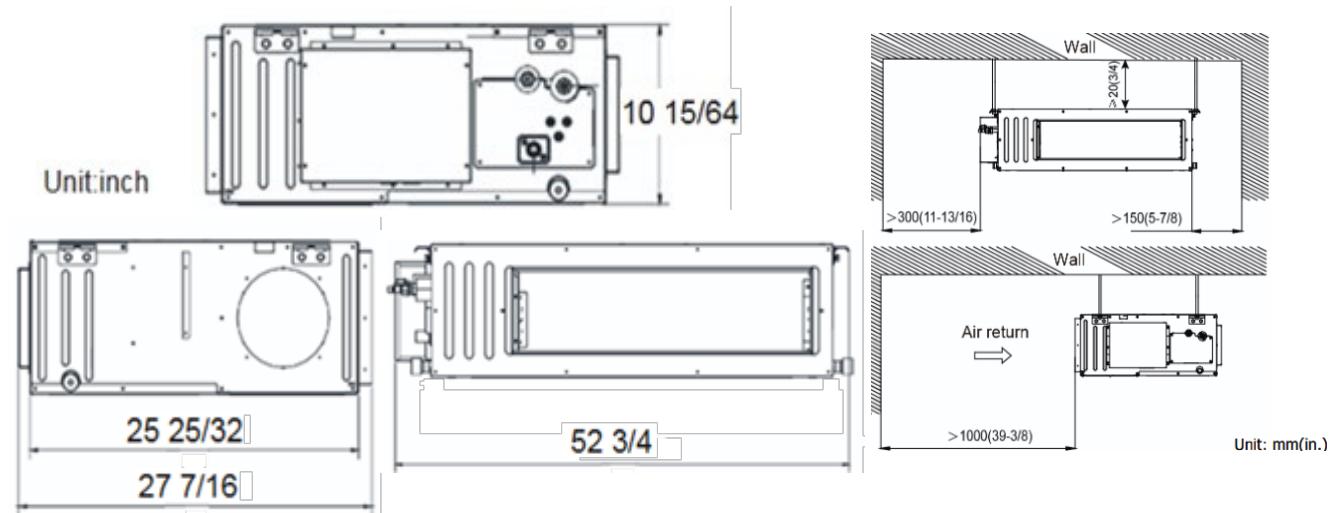

Power supplied by outdoor unit	
Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	5/8in (16mm)
Drain pipe (Outer Diameter)	1.02in (26mm)

## Included Features

Drain pump	8C heating	Dehumidfy	Self clean	Forced defrost	Soft start	Low voltage startup
------------	------------	-----------	------------	----------------	------------	---------------------

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.