

Welcome to visit follow Gree Global Platform



Note:
Gree is committed to continuously improving its products to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.
All features and specifications are subject to change without prior notice.
All images provided in this catalogue are used for illustration purposes only.
Copyright© Gree Electric Appliances, Inc. of Zhuhai. All rights reserved.
GC-2501-02

Welcome to visit follow Kinghome Canada Platform

Kinghome Canada Website



- Explore Kinghome Resources:
- Product Information
 - Manuals
 - Sales Brochures
 - Technical Submittals
 - Warranty Registration & Claims

www.kinghomecanada.com



@Kinghome Canada



@kinghome_canada



@KinghomeCanada_official



a member of GREE group

GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI

Contact add: West Jinji Rd, Qianshan, Zhuhai, Guangdong, China 519070

Tel: (+86-756) 852 2218 Fax: (+86-756) 8614998

Email: gree@cn.gree.com https://global.gree.com

HONG KONG GREE ELECTRIC APPLIANCES SALES LIMITED

Add: Unit 2612, 26/F, Mira Place Tower A 132 Nathan Road, TsimshaTsui, Kowloon, Hong Kong

Tel: (852) 3165 8898 Fax: (852) 3165 1029



ULTRANIXX **ULTRA HEAT** UNIVERSAL UNITARY SPLIT SYSTEM (DUEL FUEL)

With IDU of Air Handler,
A Coil & Gas Furnace



PRODUCT LINE UP



OUTDOOR UNIT CONDENSING UNIT

Series	Capacity	Efficiency	Dimension (W*D*H)mm	Dimension (W*D*H)Inch	Refrigerant	Power Supply
ECO Series	2/3ton	17 SEER2/ 8.5 HSPF2	710*710*664	27.95*27.95*26.14	R32	208/230V~ 60Hz
	4/5ton		710*710*850	27.95*27.95*33.46		
Ultra Heat Series	2/3ton	20 SEER2/ 11 HSPF2	701*710*750	27.95*27.95*29.92		
	4/5ton		750*750*850	29.92*29.92*33.46		

AIR HANDLER

Capacity	Dimension (W*D*H)mm	Dimension (W*D*H)Inch	Max. Static Pressure	Refrigerant	Power Supply
2/3ton	445*550*1255	17.52*21.65*49.41	300Pa	R32	115/208/230V~ 60Hz
4/5ton	534*550*1395	21.02*21.65*54.92	300Pa	R32	115/208/230V~ 60Hz

A-COIL

Capacity	Dimension (W*D*H)mm	Dimension (W*D*H)Inch	Refrigerant	Power Supply
2/3ton	445*550*625	17.52*21.65*24.61	R32	24V~ 60Hz
4/5ton	534*550*755	21.02*21.65*29.72	R32	24V~ 60Hz

GAS FURNACE

Model	Dimension (W*D*H)mm	Dimension (W*D*H)Inch	Input Power (BTU/H)	Output Power (BTU/H)	Max. Outlet Temperature (°F)	Power Supply	Gas Source
GF97T080B03a	445*857*730	17.5*33.75*28.75	60 000/39 000	57 000/37 000	150	115V~ 60Hz	Natural Gas, Liquefied Gas
GF97T080B03a	445*857*730	17.5*33.75*28.75	80 000/56 000	76 000/53 000	150	115V~ 60Hz	Natural Gas, Liquefied Gas

Extreme Performance

Ultra Heat Series
G-Hyper Compressor
Super Dual-cylinder Two-stage EVI Inverter Compressor


Stable operation at

-40°F(-40°C) evaporation temperature

158°F(70°C) condensation temperature

Two-stage compression

Superior low-temperature heating effect

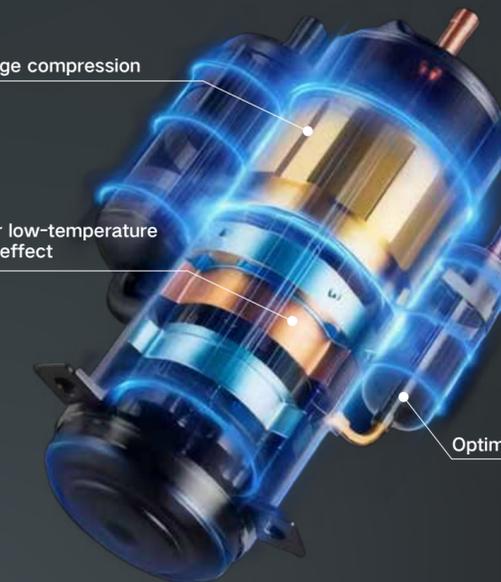

Optimized oil circuit structure


All-Climate Performance

Super Dual-cylinder Two-stage EVI Inverter Compressor

Operating Range **-32** X **130**



Ultra Cooling and Heating

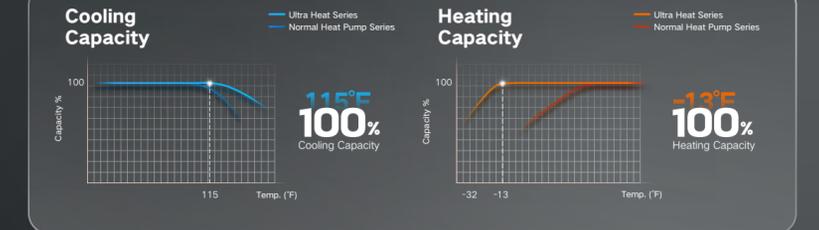

*For Ultra Heat Series

20
SEER2

11
HSPF2

*For Ultra Heat Series



*The ultra-heat series is certified by AHRI-E-Star, CEE and NEEP. The ECO series is AHRI-certified and NEEP-certified, with E-Star and CEE certifications offered on some models. And Power Grid Demand Response (DR) capability is standard for both series.

Intelligent Communication & Control

Dual Fuel

Intelligently and automatically switch heat sources

- Based on thermal comfort, electricity vs. gas cost economics.
- Heat pump selected under moderate room temperature & economical electricity
 - Gas heating selected under low room temperature & economical gas
 - Real-time calculation via cloud computing through weather forecasts



RS485 & 24V Dual Communication

Convenient for engineering wiring & meet the market demand for replacement



Reliability & Safety



Heat Dissipation of Refrigerant

Anti-Corrosion Design

Black anti-corrosion fins
2,000 hours of neutral salt spray test



3-layer structure:
• Substrate
• Anti-corrosion layer
• Hydrophilic layer

Dual Electric Heating Belt

The outdoor unit is equipped with dual electric heating belts, ensuring reliable heating in low ambient temperature.




Electric heating belt of compressor crankcase

- Preheat the compressor
- Effectively ensure the superheat of oil temperature during low-temperature startup to prevent liquid slugging startup

Chassis electric heating

- Conduct defrosting for the chassis
- Prevent abnormal fan operation caused by snow accumulation and icing
- Ensures reliable heating of the unit



Indoor Units

Air Handler

Input power voltage level self-check and adaptation technology

Self-check input power voltage: 115V or 208V or 230V
Adaptable to different installation environments
No power supply renovation required during installation & reducing renovation cost



300Pa high static pressure




Standard internal rotor fan

New external rotor DC fan

Air handler's static pressure up to 300 Pa
Multiple static pressure settings
Long-distance air distribution throughout the whole house

4 air outlet ways for various installation direction

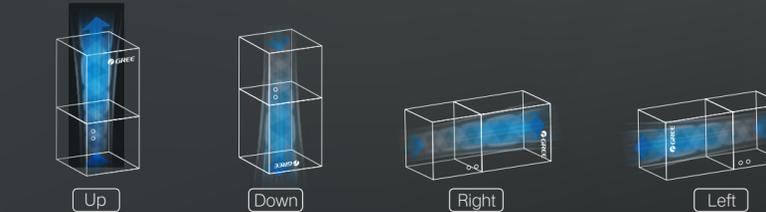

A-Coil

16 SEER2


Flexibly connect different series of outdoor units
COIL-ONLY certification
Aluminum tube evaporator

- **1000** hours of SWAAT salt spray test
- A-COIL with painted zinc-aluminum tubes
- Excellent corrosion resistance



4 air outlet ways for various installation direction

The A-COIL, when paired with the third-party furnace, can achieve top, bottom, left, and right air discharge.

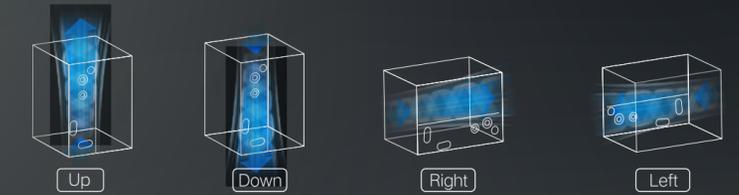

Gas Furnace



High-efficiency heating

60k/80k high power | **96%** high efficiency

3 directional installation



Dual Fuel

Flexible dual fuel supply of natural gas and liquefied gas

Constant air volume control

Stable air discharge with pressure variation to achieve comfortable constant temperature