




Indoor unit specifications


Ducted High Static		KM12XFDI	
Air flow volume		dB (A)	
Turbo	353 CFM	600 m3/h	39
High	288 CFM	490 m3/h	32
Med-high	N/A	N/A	N/A
Medium	247 CFM	420 m3/h	26
Med-low	N/A	N/A	N/A
Low	212 CFM	360 m3/h	25
Sleep	N/A	N/A	N/A

Net weight:	70.5 Lbs	Gross weight	83.8 Lbs
	32 Kg		38 Kg
Included:	Wired Controller XE72-44/E		
Dehumidification level:	2.96 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller:	XE72-44E		

Indoor unit Dimensions			
------------------------	--	--	--

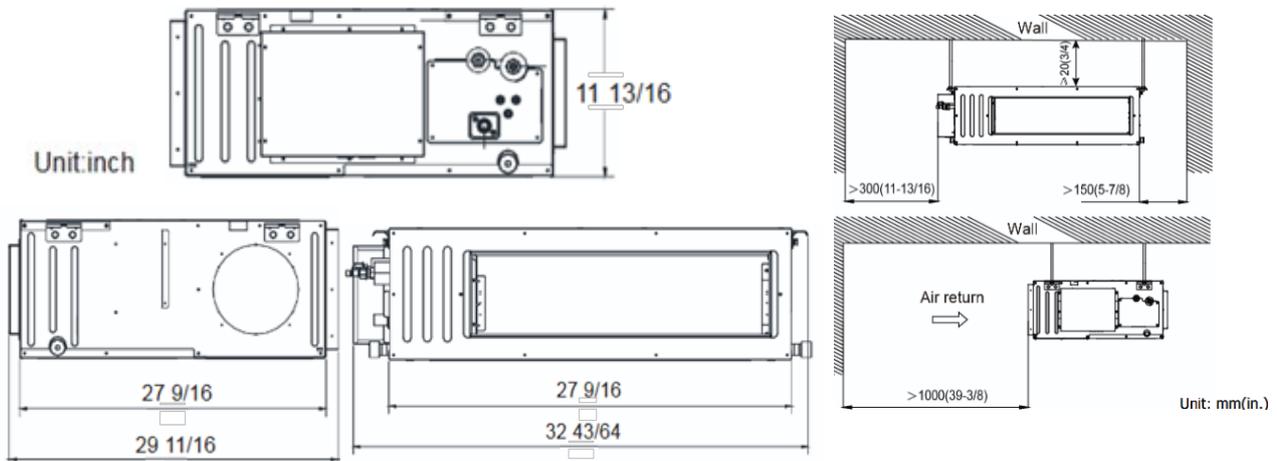

Minimum indoor unit clearances

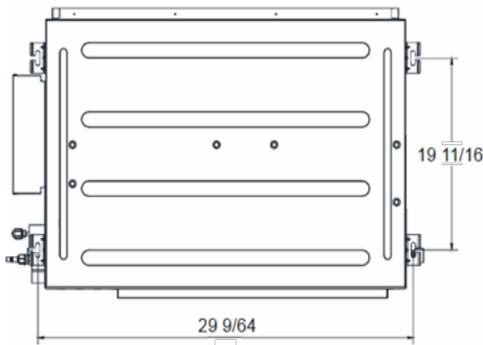

Power supplied by outdoor unit	
Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.56mm)
Drain pipe (Outer Diameter)	.98in (25mm)

Included Features						
Drain pump	8C heating	Dehumidify	Self clean	Forced defrost	Soft start	Low voltage startup

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.