


Ductless Mini Splits

12
YEAR
WARRANTY
COMPRESSOR

12
YEAR
WARRANTY
ALL PARTS



SINGLE-ZONE CLIVIA

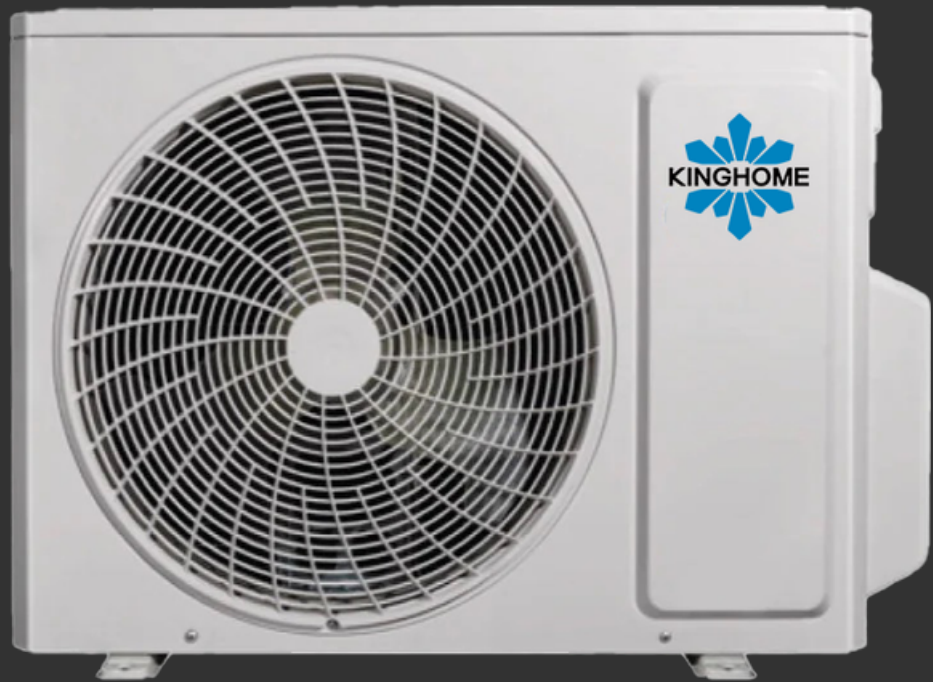

UP TO
26 SEER2
10.4 HSPF2

COOLING RANGE

- 29°C - 50°C

HEATING RANGE

- 30°C - 30°C



Wi-Fi



App Control



Humidity Control



3D Airflow



Auto
Restart



8°C Heating
Mode



Anti-Corrosion
Protection



Self-Cleaning

New R32 Refrigerant: Delivers higher energy efficiency and reduced environmental impact while helping lower energy consumption

Mini ERV: Optional add-on for improved efficiency and fresh air ventilation

Ultra-Quiet Operation: Indoor sound levels as low as 20 dB(A)

Auto Restart: In the event of a power outage, the unit will automatically restart when power is restored and resume operation using its previous settings

Self-Cleaning Technology: Utilizes condensation, frosting, sterilization, and defrosting cycles to remove dirt and reduce odors

SYSTEM TYPE			HEAT PUMP			
Outdoor Model			KW09XQ25S1DO	KW12XQ25S1DO	KW18XQ25S1DO	KW24XQ25S1DO
Indoor Model			KW09XQ25S1DI	KW12XQ25S1DI	KW18XQ25S1DI	KW24XQ25S1DI
SYSTEM PERFORMANCE						
Cooling Capacity	Min - Max	Btu/h	2,730 - 12,966	2,729.6 - 15,012.8	5,118 - 22,178	3,990 - 28,000
	Rated Capacity @95°F	Btu/h	9,100	12,000	18,000	22,000
Heating Capacity	Min - Max	Btu/h	2,388 - 15,013	3,070.8 - 15,695.2	4,436 - 22,178	2,900 - 27,300
	Rated Capacity @47°F	Btu/h	10,500	12,000	18,000	23,000
	Rated Capacity @17°F	Btu/h	11,000	7,700	18,000	20,000
	Rated Capacity @5°F	Btu/h	9,500	11,000	14,600	18,000
SEER2			26	24.5	24.5	23.5
EER2			15	13	13.65	12
HSPF2			10.4	9.5	9	9
COP @5°F			1.88	1.95	1.9	1.8
Energy Star® Certified			YES	YES	YES	YES
Energy Star® Certified with Cold Climate Designation			YES	YES	YES	YES
Cooling Temperature Range		°C	-29 - 50	-29 - 50	-29 - 50	-29 - 50
Heating Temperature Range		°C	-30 - 30	-30 - 30	-30 - 30	-30 - 30
Refrigerant Type			R32			
INDOOR UNIT			KW09XQ25S1DI	KW12XQ25S1DI	KW18XQ25S1DI	KW24XQ25S1DI
Power Supply			Powered by the outdoor unit			
Air flow (Min - Max)		CFM	129 - 353	212 - 400	324 - 589	235 - 559
Sound Pressure Level (Min - Max)		dB(A)	20 - 41	20 - 43	29 - 48	29 - 47
Dehumidification		L/h	0.8	1.4	1.8	2.4
External Dimensions (W x H x D)		in	32 61/64 × 11 17/32 × 7 7/8	32 61/64 × 11 17/32 × 7 7/8	39 3/32 × 12 1/4 × 8 47/64	39 3/32 × 12 1/4 × 8 47/64
Package Dimension (W x H x D)		in	35 9/32 × 14 11/16 × 10 45/64	35 18/64 × 14 44/64 × 10 45/64	41 17/32 × 15 5/32 × 11 47/64	41 17/32 × 15 5/32 × 11 47/64
Net Weight		lbs	20.9	20.9	29.8	29.8
Gross Weight			25.4	25.4	35.3	35.3
OUTDOOR UNIT			KW09XQ25S1DO	KW12XQ25S1DO	KW18XQ25S1DO	KW24XQ25S1DO
Compressor Type			R32 – Variable-Speed Rotary Compressor			
Sound Pressure Level		dB(A)	52	52	59	58
External Dimensions (W x H x D)		in	31 37/64 × 21 27/32 × 13 25/32	31 37/64 × 21 27/32 × 13 25/32	37 23/32 × 25 63/64 × 15 53/64	37 23/32 × 25 63/64 × 15 53/64
Package Dimension (W x H x D)		in	34 21/64 × 24 13/32 × 15 43/64	34 21/64 × 24 13/32 × 15 43/64	40 5/8 × 29 1/64 × 17 61/64	40 5/8 × 29 1/64 × 17 61/64
Net Weight		lbs	70.6	67.3	94.8	92.6
Gross Weight		lbs	76.1	72.8	104.7	102.5
REFRIGERANT PIPING						
Refrigerant Charge - R32		oz	30	28.2	40.6	49.4
Additional Charge		oz/ft	0.2	0.2	0.2	0.4
Line Set Size (Liquid - Gas) - Flared Connections		in	1/4 - 3/8	1/4 - 1/2	1/4 - 1/2	1/4 - 5/8
Pre-Charge Length		ft	25			
Pipe Length (Min - Max)		ft	10 - 66	10 - 66	10 - 131	10 - 131
Max. Pipe Elevation		ft	40	40	82	82
ELECTRICAL						
Power Supply			208-230V / 1Ph / 60Hz			
Voltage Range (Min - Max)		VAC	187 - 253			
Rated Current - Cooling		A	4.73	6.64	11.5	13
Rated Current - Heating		A	6	6.41	11.5	17
MOCP		A	15	15	20	30
MCA		A	10	10	16	22
Main Power Wire Size		AWG	Per Local Code			
Interconnecting Wire Size		AWG	14 / 4			
LIMITED WARRANTY			12 years residential, 5/7 years commercial parts and compressor warranty on registered models			



MiniERV

Fresh Air Kit

Innovative Two-way Ventilation System 17.6 PCM (CFM)

- Total heat exchanger can save up to 1kw-h/Day
- Sound level as low as 19 dB(A)
- Easy Maintenance

XE71-00/E Thermostat



(Optional)

Controller



(Included)



a member of **GREE** group

GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI

HONG KONG GREE ELECTRIC APPLIANCES SALES Co., Ltd.

Contact add.: West Jinji Rd, Qianshan, Zhuhai, Guangdong, China 519070

Add: Unit 2612, 26/F, Mira Place Tower A 132 Nathan Road, TsimshaTsui, Kowloon, Hong Kong

Tel: (+86-756) 852 2218

Fax: (+86-756) 8614998

Tel: (852) 3165 8898

Fax: (852) 3165 1029

Email: gree@cn.gree.com

http://global.gree.com