



Submittal-Airy 18K 1-Way Cassette

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star Heat Pump ☐

Cold Climate Energy Star Heat Pump ☒

Model numbers

Indoor: KM18XK1DI

Outdoor: KW18XQ29S1DO

Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	3700	18000	21300	AHRI NO.	Energy Star	nep
Heating:	5000	18000	23540	218451539	4,617,810	

Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
47F (8.3C)	5000	18000	20710	SEER2	20
17F (-8.3C)	9800	15500	19200	HSPF2	9.2
5F (-15C)	7850	14500	14500	EER (W/W)	3.1
				COP (W/W)	4

Outdoor temperature range

Cooling:	-29-50C	-20-122F	Power supply	208-230V/60Hz/1Ph
Heating:	-30-30C	-22-86F	Min/Max voltage	187-253Vac

Condenser specifications

Connecting type	Screw Connection	MCA	20A
Liquid line size	1/4in (6mm)	MOP	25A
Gas line size	5/8in (16mm)	Power Supply Wire	12/3 AWG
pre-charge length	24.6ft (7.5M)	Interconnecting Wire	14/4 AWG

Features:	
MIN. Refrigerant Pipe Length	10 ft (3M)
MAX. Refrigerant Pipe Length	131ft (40M)
MAX. Vertical Height difference (total)	82 ft (25M)
Refrigerant Type	R-32
Factory Charge	47oz
Additional Charge	0.4 oz/ft
Sound Pressure Level	59dB (A)
Weight	
Gross weight:	104.7Lbs (47.5Kg)
Net weight:	94.8Lbs (43Kg)



R32

20 Inverter




AHRI




Outdoor unit Dimensions

Unit: inch

KW18XQ29S1DO

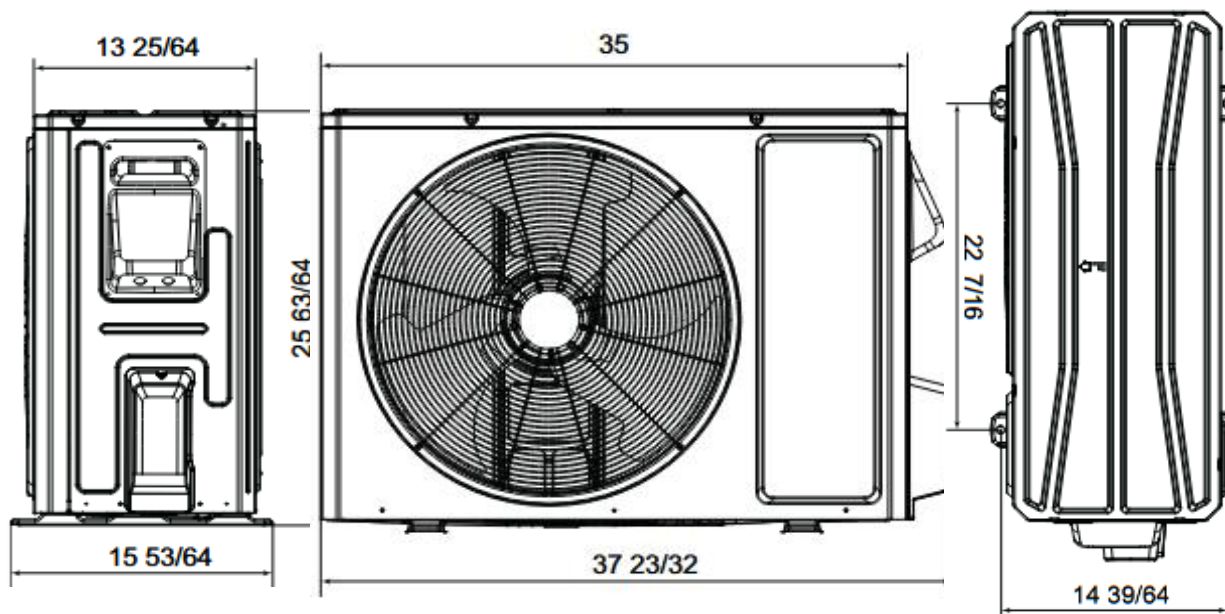

Minimum outdoor unit clearances

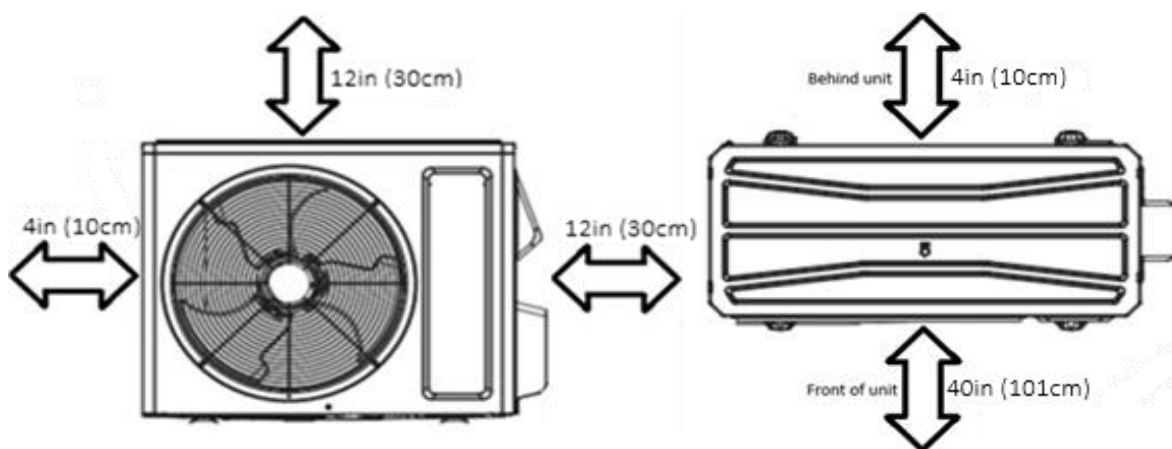

Unit must be placed a minimim 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.




Indoor unit specifications


1-Way Cassette		KM18XK1DI	
Air flow volume			dB (A)
Turbo	412 CFM	700m3/h	43
High	353 CFM	600 m3/h	39
Med-high	n/a	n/a	n/a
Medium	294 CFM	500 m3/h	36
Med-low	n/a	n/a	n/a
Low	265 CFM	450 m3/h	35
Sleep	n/a	n/a	n/a

Net weight:	44.1 Lbs	Gross weight:	59.5 Lbs
	20 Kg		27 Kg
Included:	Infrared remote YBE1FB5F		
Dehumidification level:	3.8 pt/hr		
Optional Accessories			
24V interlock wired controller:	XE71-00/E		
Wired controller:	XE71-44G		
Embedded wired controller:	XE74-44E		
Embedded WIFI wired controller	XE72-44E		

Indoor unit Dimensions

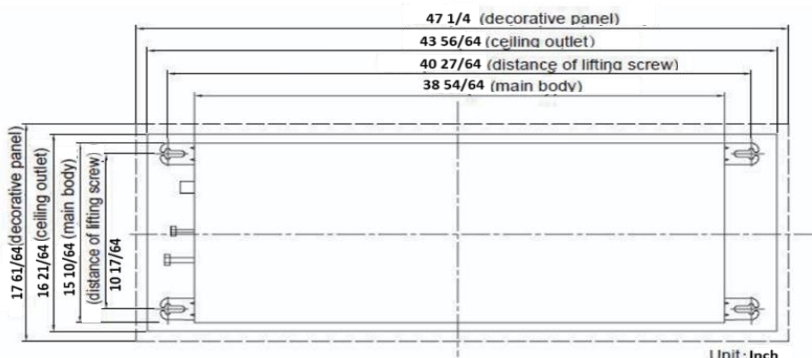

Minimum indoor unit clearances

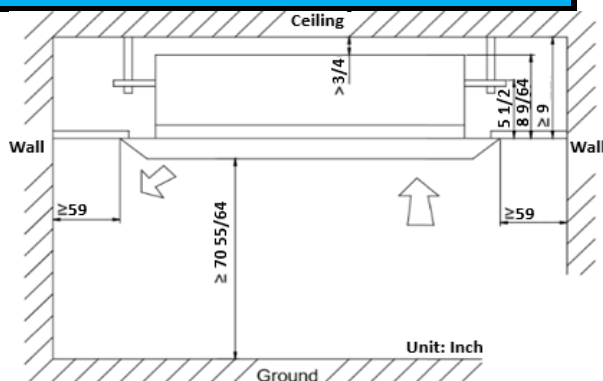

Power supplied by outdoor unit

Additional Information	
Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	1/2in (12mm)
Drain pipe (Outer Diameter)	1in (26mm)
Panel Net Weight	9.2 Lbs (4.2Kg)
Panel Gross Weight	13.2 Lbs (6Kg)

Included Features

Self Clean	8C heating	I-feel	Water Pump	Soft start	Force Defrost
------------	------------	--------	------------	------------	---------------