



Submittal-Clivia18K Floor Ceiling

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star Heat Pump

Cold Climate Energy Star Heat Pump

Model numbers

Indoor: KM18XTDI

Outdoor: KW18XQ25S1DO

Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification	
Cooling:	4400	18000	21496	AHRI NO.	Energy Star
Heating:	4300	18000	21496	218451536	4,617,812.

Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
47F (8.3C)	4300	18000	21496	SEER2	21.5
17F (-8.3C)	7800	14700	16000	HSPF2	8.5
5F (-15C)	6700	15800	15800	EER (W/W)	3.7
				COP (W/W)	3.9

Outdoor temperature range

Cooling:	-29-50C	-20-122F	Power supply	208-230V/60Hz/1Ph
Heating:	-30-30C	-22-86F	Min/Max voltage	187-253Vac

Condenser specifications

Connecting type	Screw Connection	MCA	16A
Liquid line size	1/4in (6mm)	MOP	20A
Gas line size	1/2in (12mm)	Power Supply Wire	12/3 AWG
pre-charge length	24.6ft (7.5M)	Interconnecting Wire	14/4 AWG

MIN. Refrigerant Pipe Length	10 ft (3M)	Features:	
MAX. Refrigerant Pipe Length	131ft (40M)	Electronic expansion valve	
MAX. Vertical Height difference (total)	82 ft (25M)	Rotary compressor	
Refrigerant Type	R-32	Basepan heater	
Factory Charge	41oz	Compressor electric heater	
Additional Charge	0.2 oz/ft	Weight	
Sound Pressure Level	59dB (A)	Gross weight:	104.7Lbs (47.5Kg)
		Net weight:	94.8Lbs (43Kg)



R32

20 Inverter




AHRI




Outdoor unit Dimensions

KW18XQ25S1DO

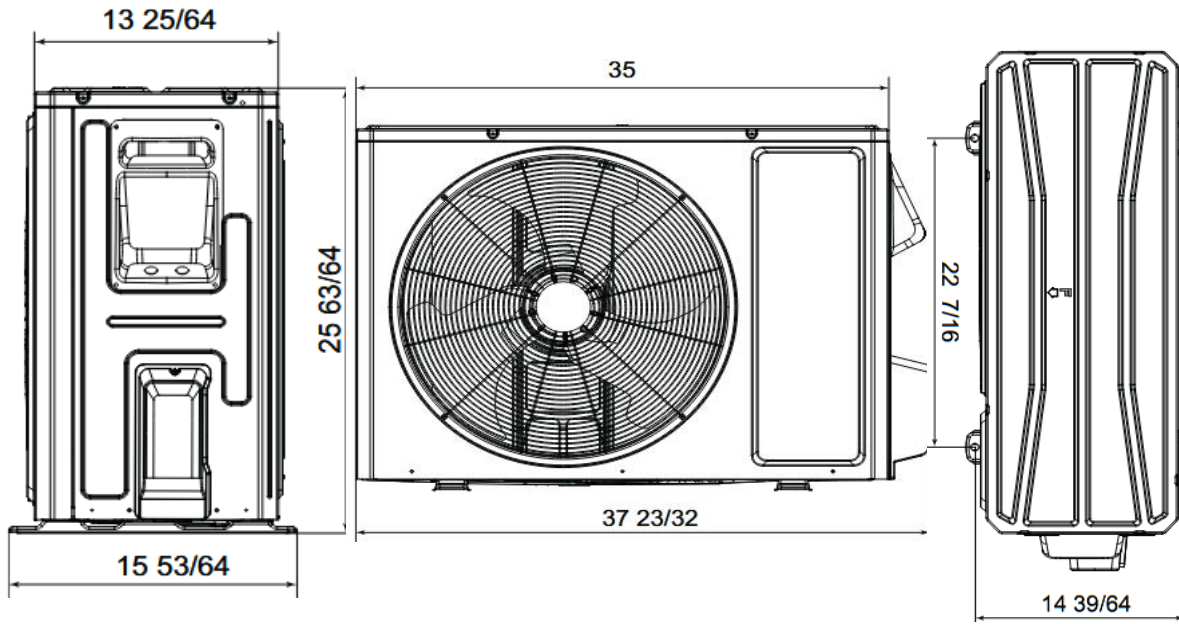

Minimum outdoor unit clearances

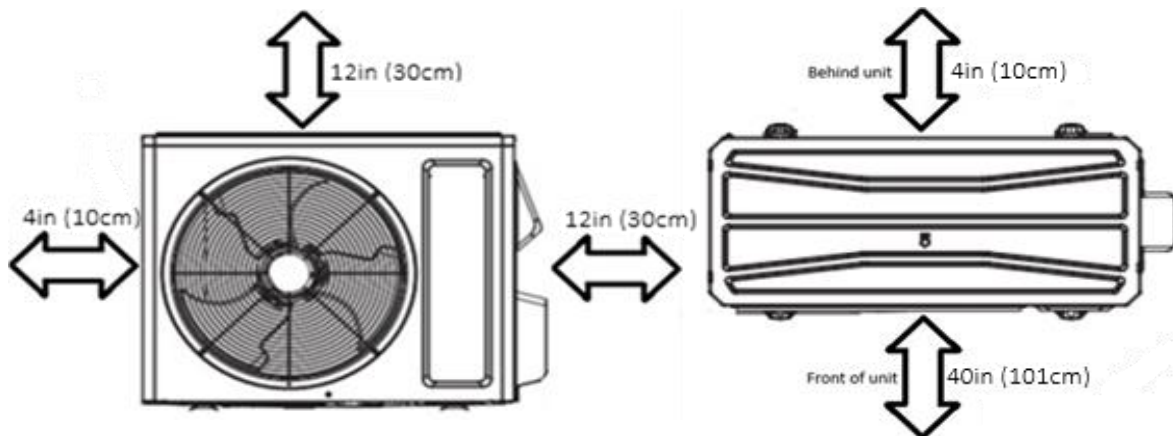


Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.



Indoor unit specifications

Floor Ceiling		KM18XTDI		Net weight:	56.2 Lbs	Gross weight:	67.2 Lbs
Air flow volume		dB (A)			25.5 Kg		30.5 Kg
Turbo	530 CFM	900 m3/h	48	Included:	Infrared remote YBE1FB5F		
High	453 CFM	770 m3/h	41	Dehumidification level:		1.8 pt/hr	
Med-high	N/A	N/A	N/A	Optional Accessories			
Medium	412 CFM	700 m3/h	38	24V interlock wired controller:		XE71-00/E	
Med-low	N/A	N/A	N/A	Wired controller:		XE71-44G	
Low	383 CFM	650 m3/h	36	Embedded wired controller:		XE74-44E	
Sleep	N/A	N/A	N/A	Embedded WIFI wired controller		XE72-44E	
Indoor unit Dimensions							

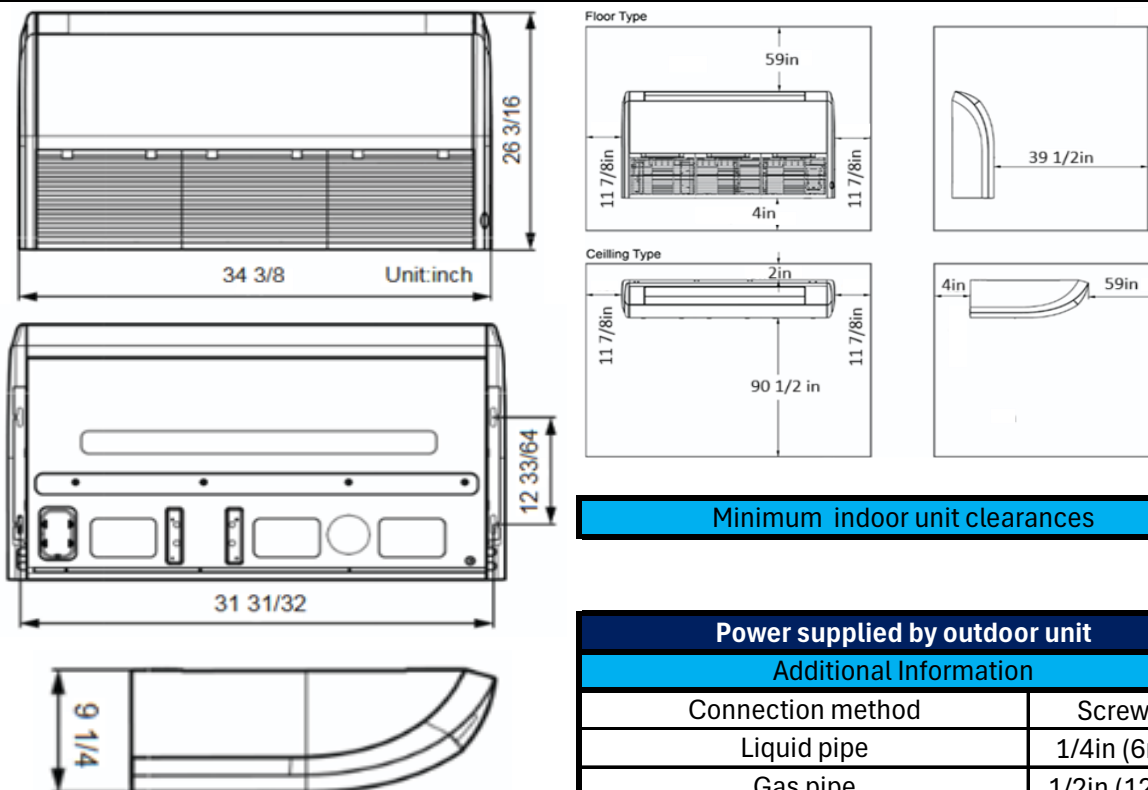

Minimum indoor unit clearances

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	1/2in (12mm)
Drain pipe (Outer Diameter)	3/4in (17mm)

Included Features

Dehumidify	Soft Start	I-feel	Self clean	8C heating	Forced defrost
------------	------------	--------	------------	------------	----------------