



Submittal-Clivia 9K 1-Way

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star Heat Pump

Cold Climate Energy Star Heat Pump

Model numbers

Indoor: KM09XK1DI

Outdoor: KW09XQ25S1DO

Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	2560	9100	11000	AHRI NO.	Energy Star	nep
Heating:	2900	10500	14000	218451521		

Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
47F (8.3C)	2900	10500	14000	SEER2	22
17F (-8.3C)	4300	8800	11000	HSPF2	9.2
5F (-15C)	3100	9400	9400	EER (W/W)	3.8
				COP (W/W)	4

Outdoor temperature range

Cooling:	-29-50C	-20-122F	Power supply	208-230V/60Hz/1Ph
Heating:	-30-30C	-22-86F	Min/Max voltage	187-253Vac

Condenser specifications

Connecting type	Screw Connection	MCA	10A
Liquid line size	1/4in (6mm)	MOP	15A
Gas line size	3/8in (9.52mm)	Power Supply Wire	14/3 AWG
pre-charge length	24.6ft (7.5M)	Interconnecting Wire	14/4 AWG

MIN. Refrigerant Pipe Length	10 ft (3M)	Features:	
MAX. Refrigerant Pipe Length	100 ft (30M)	Electronic expansion valve	
MAX. Vertical Height difference (total)	60 ft (20M)	Rotary compressor	
Refrigerant Type	R-32	Basepan heater	
Factory Charge	30oz	Compressor electric heater	

Additional Charge	0.2 oz/ft	Weight	
Sound Pressure Level	52dB (A)	Gross weight:	77.2Lbs (35Kg)
		Net weight:	71.7Lbs (32.5Kg)



R32

20 Inverter




AHRI




Outdoor unit Dimensions

KW09XQ25S1DO

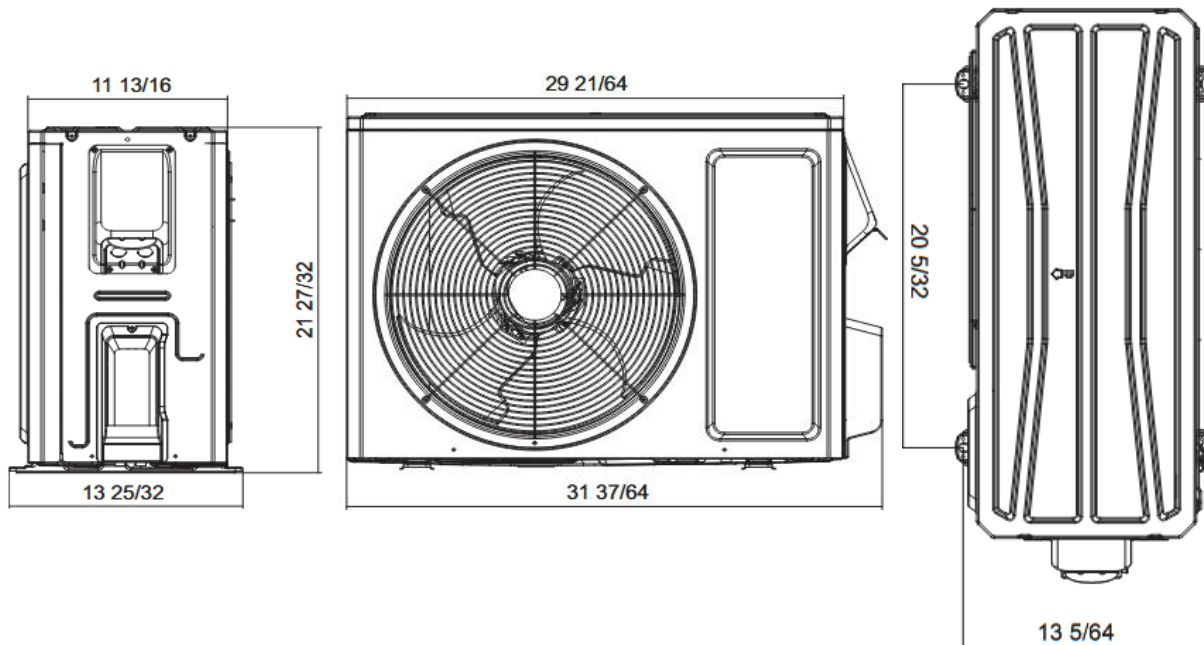

Minimum outdoor unit clearances

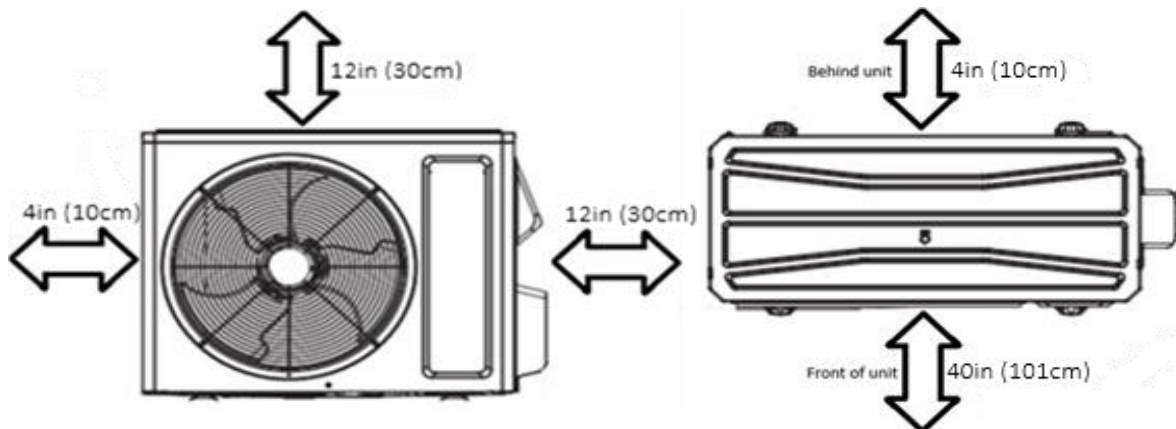


Unit must be placed a minimim 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.




Indoor unit specifications

1-Way Cassette			KM09XK1DI			Net weight:		42.9 Lbs		Gross weight:		58.4 Lbs		
Air flow volume				dB (A)				19.5 Kg				26.5 Kg		
Turbo	324 CFM	550m3/h	37			Included:		Infrared remote YBE1FB5F						
High	265 CFM	450 m3/h	35			Dehumidification level:		1.69 pt/hr						
Med-high				n/a		n/a	n/a	Optional Accessories						
Medium	230 CFM	390 m3/h	32			24V interlock wired controller:		XE71-00/E						
Med-low	n/a	n/a	n/a			Wired controller:		XE71-44G						
Low	200 CFM	340 m3/h	31			Embedded wired controller:		XE74-44E						
Sleep	n/a	n/a	n/a			Embedded WIFI wired controller		XE72-44E						
Indoor unit Dimensions														

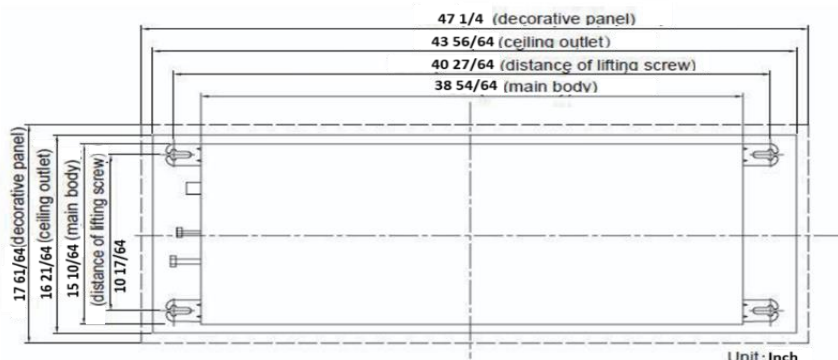

Minimum indoor unit clearances

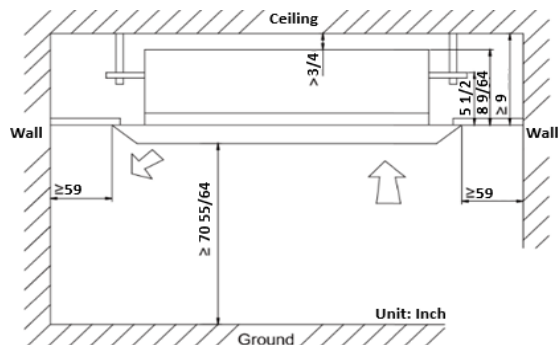

Power supplied by outdoor unit

Additional Information

Connection method	Screwed
Liquid pipe	1/4in (6mm)
Gas pipe	3/8in (9.52mm)
Drain pipe (Outer Diameter)	1in (26mm)
Panel Net Weight	9.2 Lbs (4.2Kg)
Panel Gross Weight	13.2 Lbs (6Kg)

Included Features

Water pump	8C heating	I-feel	Forced defrost	Soft start	Self clean
------------	------------	--------	----------------	------------	------------