



Submittal-60K-UltraniXX

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star

Cold Climate Energy Star

Model numbers

Indoor: KCAC60HI

Outdoor: KU60UXO

Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	15200	52000	53100	AHRI NO.	Energy Star	nep
Heating:	14400	54000	54000	217603526	-	

Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
47F (8.3C)	14400	54000	54000	SEER2	16
17F (-8.3C)	7800	35200	35600	HSPF2	9
5F (-15C)	18900	40000	40000	EER2	9.8
				COP	3.1

Outdoor temperature range


Cooling:	-15-54C	5-129F	Electrical	Power supply	208-230V/60Hz/1Ph
Heating:	-30-24C	-22-75F		Min/Max voltage	187-253Vac

Condenser specifications

Connecting type	Screw Connection	MCA	39A
Pre-charge length	25ft (7.5M)	MOP	45A
MIN. Refrigerant Pipe Length	10 ft (3M)	Power Supply Wire	8/2 AWG
Liquid Pipe Size	3/8in (9.52mm)	Interconnecting Wire	18/6AWG or 18/2AWG

Gas Pipe Size	3/4in (19mm)	Features	
Max Height Between Indoor/Outdoor	50ft (15M)	Electronic expansion valve	
Max. Pipe Length	100ft (30M)	Rotary compressor	
Refrigerant Type	R-32	Basepan heater	
Factory Charge	162oz	Compressor electric heater	

Weight			
Additional Charge	0.3 oz/ft	Gross weight:	263.5Lbs (119.5Kg)
Sound Pressure Level	62dB (A)	Net weight:	241.4Lbs (109.5Kg)



R32

20 Inverter






AHRI




Outdoor unit Dimensions

KU60UXO

Unit: Inch

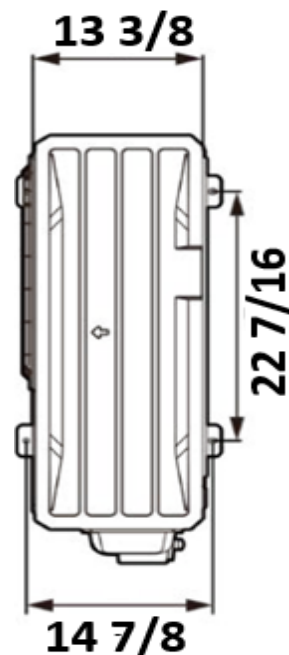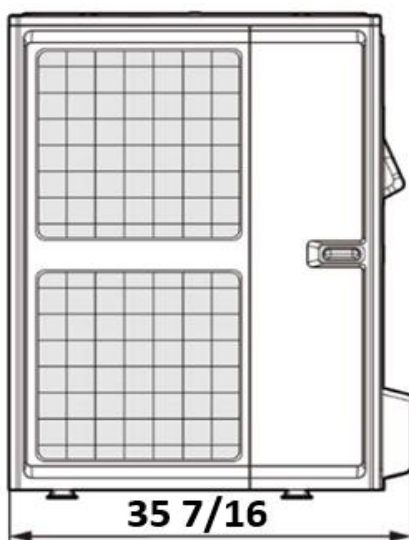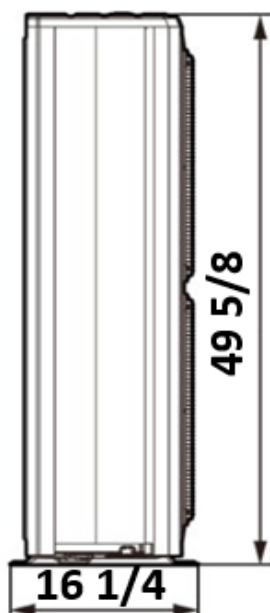

Minimum outdoor unit clearances

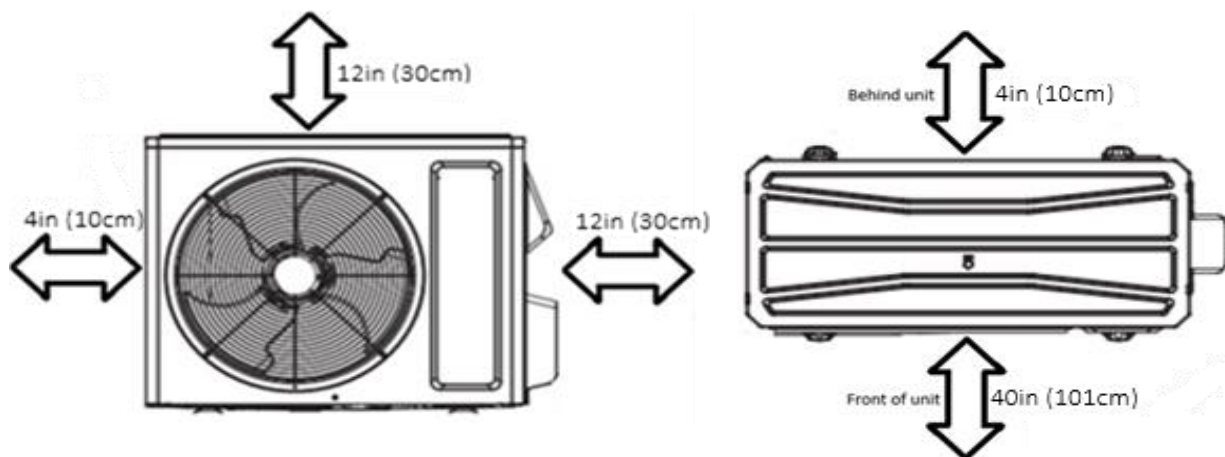

Unit must be placed a minimim 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.


Please follow local best practices and guidelines.





Indoor unit specifics

KCAC60HI

Move to the left:



Move to the right:

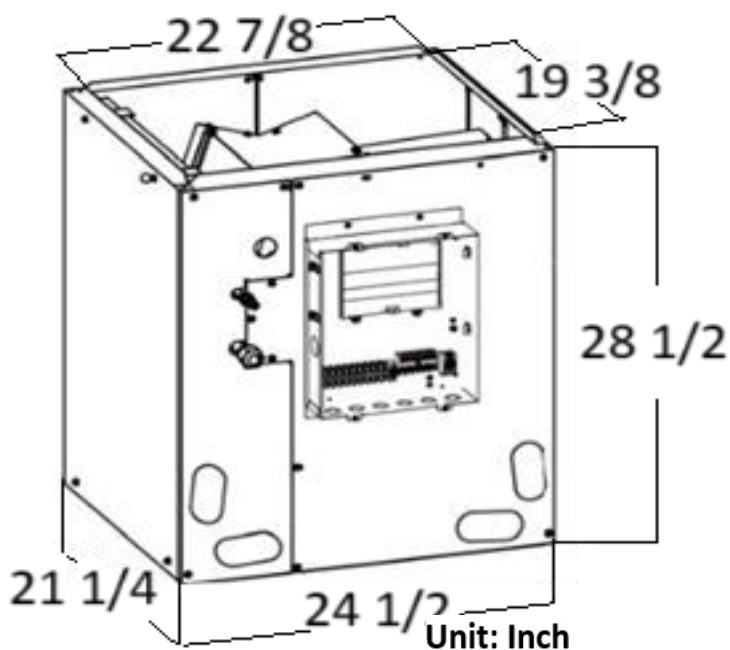

Control board can be moved according to installation needs

Optional Smart thermostat		Technical Specifications	
		Power Supply	24V/60Hz/1Ph
		Throttling method	Electronic Expansion Valve
		Connection method	Screwed
		Liquid pipe size	3/8in (9.52mm)
		Gas pipe size	3/4in (19mm)
		Net weight	110 lbs (50Kg)
		Gross Weight	123.5 Lbs (56Kg)
		Drain Pipe Outlet	SCH 40 3/4
		Includes R32 Refrigerant Sensor	
		Can be installed horizontally	