




SPLIT TYPE

CHARMO

Model:
KW07HQ19SDI
Match with
Multizone

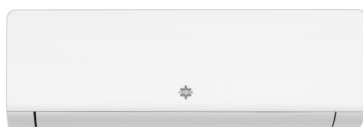

Item	Unit	Parameter
Indoor Model	\	KW07HQ19SDI
System Rating		
Cooling Capacity	Btu/h	7000
Heating Capacity	Btu/h	8000
Power Supply	\	208-230V/1Ph/60Hz
SEER2	\	System Performance Based on the Connected Outdoor
HSPF2	\	
EER2	\	Unit Performance
COP	\	
Gas Pipe	inch (mm)	3/8 (9.52)
Liquid Pipe	inch (mm)	1/4 (6)
Standard Pipe Length	ft (M)	24.6 (7.5)
MIN. Refrigerant Pipe Length	ft (M)	10 (3)
MAX. Refrigerant Pipe Length	ft (M)	65 (20)
MAX. Vertical Height difference between Indoor and Outdoor	ft (M)	40 (12)
Connection Method	\	Screw Connection
Refrigerant Type	\	R410a
Controller Model	\	YAP1FB2F
Indoor Unit Data		
Air Flow Volume	CFM	135~258
Sound Pressure Level	dB(A)	24~39
Dehumidification	pt/hr	1.27
Min/Max Voltage	V	108-126
Power supply	-	Powered by the Outdoor Unit
Dimension (HxWxD)	inch	10 1/4 x 27 7/8 x 7 5/16
Net Weight	lbs	15.4
Gross Weight	lbs	18.7



Job Name:




Schedule Reference:

Date:

Specification are subject to change without notice.



Outline and Physical Dimension of KW07HQ19SD

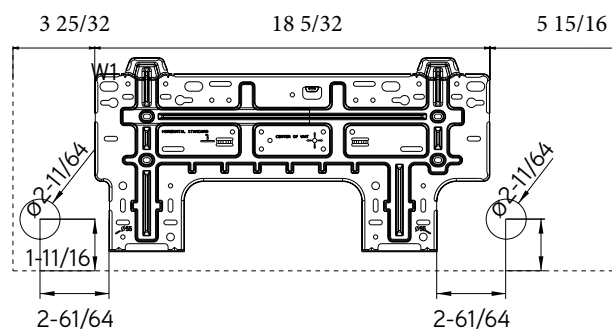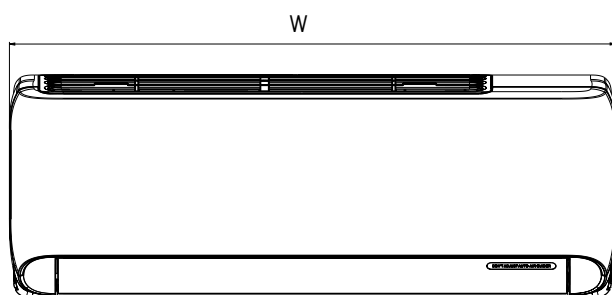

Dimensions	
W	$27 \frac{7}{8}$
H	$10 \frac{1}{4}$
D	$7 \frac{5}{16}$

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	3/8-in OD Flared
Drain Connector	5/8-in OD

Units: inch

