



## Submittal-30K Multizone

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

### Warranty information

Standard 7 years parts & compressor  
Registered 12 years parts & compressor  
Terms and conditions apply

### Type

Energy Star Heat Pump ☐  
Cold Climate Energy Star Heat Pump ☒

### Model numbers


Indoor: All Ducted

Outdoor: KM30X6O

### Capacity range




Reduction fittings included



R32




Output (BTU/H)		Minimum	Rated	Max	Certification		
Cooling:		8190	28400	34100	AHRI NO.	Energy Star	
Heating:		8190	30000	40900	215708448	3,712,025.	
Heating performance					Efficiency Ratings		
Output (BTU/H)		Minimum	Rated	Max	SEER2	21	
47F (8.3C)		8200	30000	30400	HSPF2	10	
17F (-8.3C)		8800	27200	31860	EER (W/W)	4	
5F (-15C)		8800	26000	26000	COP (W/W)	4.19	
Outdoor temperature range					Electrical		
Cooling:	-30-48C		-22-118F		Power supply	208-230V/60Hz/1Ph	
Heating:	-30-24C		-22-75F		Min/Max voltage	187-253Vac	
Condenser specifications					MCA	23A	
Connecting type			Screw Connection		MOP	35A	
Pre-charge length			131ft (40M)		Power Supply Wire	3/10 AWG	
MIN. Refrigerant Pipe Length			10 ft (3M)		Interconnecting Wire	4/14 AWG	
MAX. Height difference (Indoor/Indoor)			82ft (25M)		Features:		
MAX. Height difference (Indoor/Outdoor)			82ft (25M)		Electronic expansion valve		
MAX. Length per Individual Indoor			82ft (25M)		Rotary compressor		
MAX. Refrigerant Pipe Length (Total)			197ft (60M)		Basepan heater		
Refrigerant Type			R-32		Compressor electric heater		
Factory Charge			77oz		Weight		
Additional Charge			0.2 oz/ft		Gross weight:	161Lbs (73Kg)	
Sound Pressure Level			63 dB (A)		Net weight:	145.5Lbs (66Kg)	

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.




# Outdoor Unit Dimensions

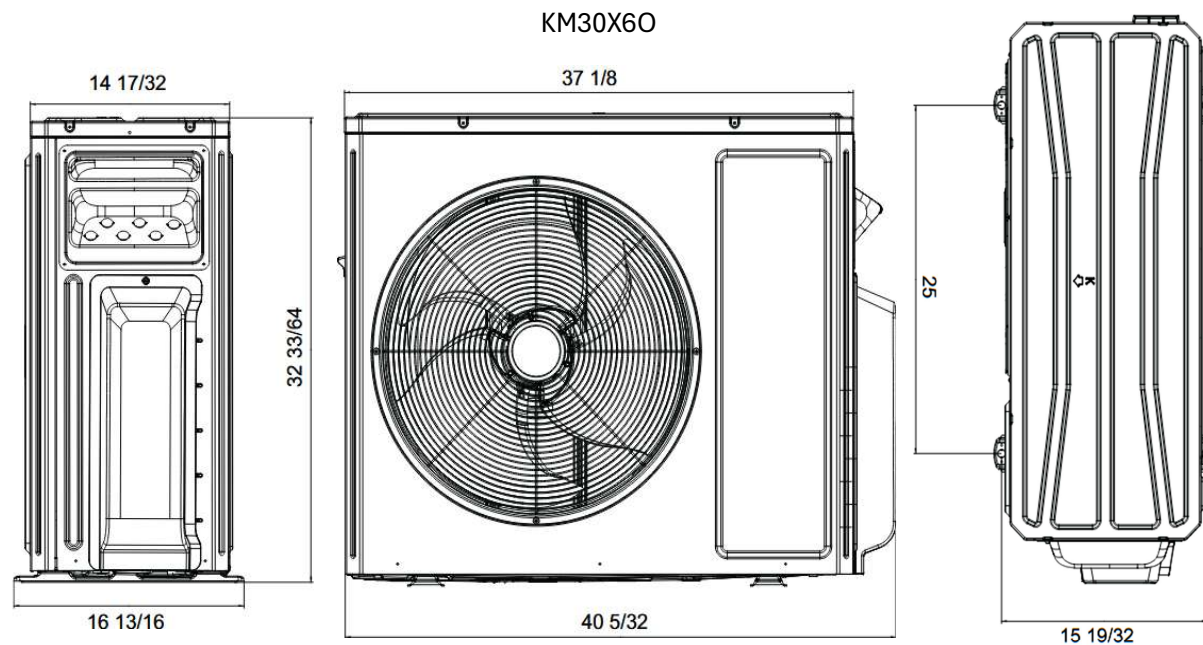

## Connection sizes

	Port 1	Port 2	Port 3	Port 4	Port 5
Liquid pipe	1/4in (6mm)	1/4in (6mm)	1/4in (6mm)	1/4in (6mm)	N/A
Gas pipe	3/8in (9.52mm)	3/8in (9.52mm)	3/8in (9.52mm)	3/8in (9.52mm)	N/A

## Minimum outdoor unit clearances

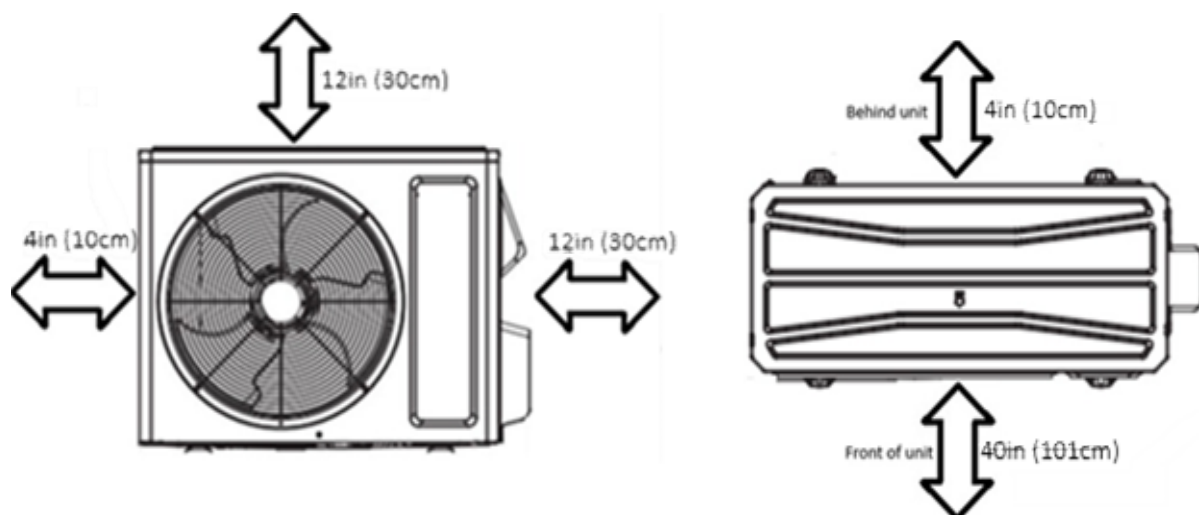

Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.